

High-Speed USB2.0 (480 Mbps) DPDT Switch

UM7222MA MSOP10
UM7222 QFN10 1.8×1.4
UM7222A QFN10 2.1×1.6

General Description

The UM7222MA/UM7222/UM7222A is a dual port high-speed, low-power data switch optimized for USB 2.0 signal switching. The UM7222MA/UM7222/UM7222A switch is configured in double-pole/double-throw DPDT. It handles bidirectional signal flow, achieving a 550 MHz -3dB bandwidth, and a port to port crosstalk and isolation at -50dB at 250MHz.

The UM7222MA/UM7222/UM7222A operates from a single +2.7V to +5.5V supply, with current consumption less than 1 microampere.

The UM7222MA/UM7222/UM7222A features wide bandwidth and low bit-to-bit skew allow it to pass high-speed differential signal with good signal integrity, offers little or no attenuation of the high-speed signals at the outputs. Its high channel-to-channel crosstalk rejection results in minimal noise interface. Its bandwidth is wide enough to pass high-speed USB 2.0 differential signals (480Mbps). The control logic threshold is guaranteed to be compatible with 1.8V logic.

The UM7222MA is available in Pb-free MSOP10 package, the UM7222 is available in Pb-free QFN10 package (1.4mm×1.8mm×0.55mm), while the UM7222A is available in Pb-free QFN10 package (2.1mm×1.6mm×0.55mm), they are ideal for portable high speed mix signal switching application.

Applications







- Differential Signal Data Routing
- USB2.0 Signal Routing
- Cell Phone, PDA, Digital Camera and Notebook
- LCD Monitor, TV and Set-Top Box

Features

- Ron is Typically 6.5Ω at V_{CC}=3.0V
- Low Bit-to-Bit Skew: Typically 50ps
- OVT on D+ and D- up to 5.5V
- Power OFF Protection:
When V_{CC}=0V, D+ and D- can Tolerate up to 5.5V
- Low Crosstalk: -50dB (250MHz)
- Low Current Consumption: 1μA
- Near-Zero Propagation Delay: 250ps
- Channel On-Capacitance: 6.5pF(Typical)
- V_{CC} Operating Range: +2.7V to +5.5V
- 550MHz Bandwidth (or Data Frequency)
- Lead (Pb)-Free MSOP10 and QFN10 Package
- ESD Rating: ±4kV I/O to GND

Pin Configurations

Top View
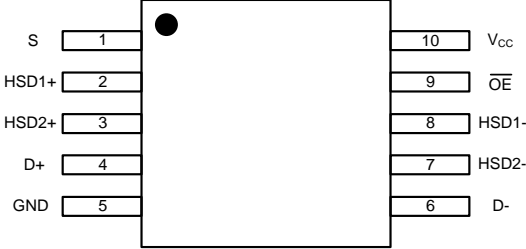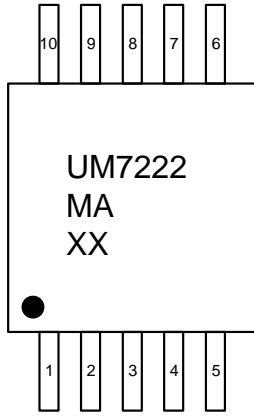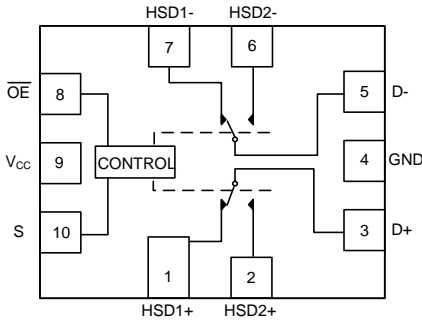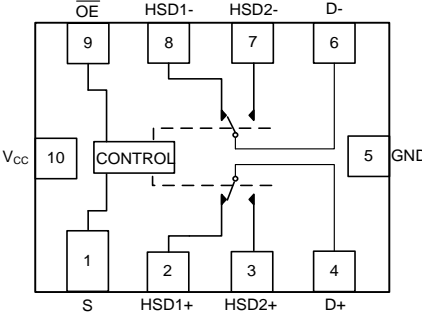
| | |
|--|--|
|  |  <p>XX: Week Code UM7222MA MSOP10</p> |
| <p>(Top View)</p>  |  <p>M: Month Code UM7222 QFN10 1.8×1.4</p> |
| <p>(Top View)</p>  |  <p>M: Month Code UM7222A QFN10 2.1×1.6</p> |

Pin Description

| Pin | | | Name | Function |
|----------|--------|---------|------------------------|-------------------------|
| UM7222MA | UM7222 | UM7222A | | |
| 2 | 1 | 2 | HSD1+ | Data Ports |
| 3 | 2 | 3 | HSD2+ | Data Ports |
| 4 | 3 | 4 | D+ | Data Ports |
| 5 | 4 | 5 | GND | Ground Connection |
| 6 | 5 | 6 | D- | Data Ports |
| 7 | 6 | 7 | HSD2- | Data Ports |
| 8 | 7 | 8 | HSD1- | Data Ports |
| 9 | 8 | 9 | $\overline{\text{OE}}$ | Output Enable |
| 10 | 9 | 10 | V _{CC} | Positive Supply Voltage |
| 1 | 10 | 1 | S | Select Input |

Ordering Information

| Part Number | Packaging Type | Marking Code | Shipping Qty |
|-------------|----------------|--------------|-----------------------------|
| UM7222MA | MSOP10 | UM7222MA | 3000pcs/13 Inch Tape & Reel |
| UM7222 | QFN10 1.8×1.4 | AC | 3000pcs/7 Inch Tape & Reel |
| UM7222A | QFN10 2.1×1.6 | AP | 3000pcs/7 Inch Tape & Reel |

Function Table

| $\overline{\text{OE}}$ | S | HSD1+, HSD1- | HSD2+, HSD2- |
|------------------------|---|--------------|--------------|
| 1 | X | OFF | OFF |
| 0 | 0 | ON | OFF |
| 0 | 1 | OFF | ON |

Absolute Maximum Ratings

| Symbol | Parameter | Limit | Unit |
|------------------|------------------------------|--------------|------|
| V _{CC} | Supply Voltage | -0.5 to +6.5 | V |
| V _{IS} | Analog Switch Input Voltage | -0.5 to +6.5 | |
| V _{IN} | Digital Select Input Voltage | -0.5 to +6.5 | |
| I _D | Continuous DC Current | 50 | mA |
| P _D | Power Dissipation | 0.5 | W |
| T _O | Operating Temperature Range | -40 to +85 | °C |
| T _{STG} | Storage Temperature Range | -65 to +150 | |

DC Electrical Characteristics

| Symbol | Parameter | Test Conditions | V _{CC} (V) | Temp | Limits (-40°C to 85°C) | | | Unit |
|-------------------|--|---|---------------------|------|------------------------|-------------|------|------|
| | | | | | Min | Typ (Note1) | Max | |
| I _{IN} | Input Leakage Current | 0 ≤ V _{IS} ≤ V _{CC} | 3.6 | Full | -1.0 | | 1.0 | μA |
| I _{OFF} | Power Off Leakage Current | 0 ≤ V _{IS} ≤ V _{CC} | 0 | Full | -1.0 | | 1.0 | μA |
| I _{CCT} | Increase in I _{CC} per Control Voltage | V _{IN} =2.6V | 3.6 | Full | | | 10 | μA |
| I _{OZ} | OFF State Leakage Current | 0 ≤ V _{IS} ≤ V _{CC} | 3.6 | Full | -1.0 | | 1.0 | μA |
| I _{CC} | Quiescent Supply Current | V _{IS} =V _{CC} or GND | 3.6 | Full | | | 1.0 | μA |
| V _{IH} | Input High Voltage | | 3.0 to 3.6 | Full | 1.3 | | | V |
| V _{IL} | Input Low Voltage | | 3.0 to 3.6 | Full | | | 0.5 | V |
| V _{IK} | Clamp Diode Voltage | I _{IS} =-18mA | 3.0 | Full | | | -1.2 | V |
| R _{ON} | On-Resistance (Note 2) | V _{IS} =0 to 0.4V I _D =8mA | 3.0 | Full | | 6.5 | 9 | Ω |
| ΔR _{ON} | On Resistance Match Between Channels (Note 2, 3) | V _{IS} =0 to 0.4V I _D =8mA | 3.0 | Full | | 0.35 | | Ω |
| R _{FLAT} | On Resistance Flatness (Note 2, 3) | V _{IS} =0 to 1.0V I _D =8mA | 3.0 | Full | | 4.5 | | Ω |

Note 1: Typically values are at V_{CC}=3.3V and T_A=+25°C.

Note 2: Guaranteed by design. Resistance measurements do not include test circuit or package resistance.

Note 3: Parameter is characterized but not tested in production.





AC Electrical Characteristics

| Symbol | Parameter | Test Conditions | V _{CC} (V) | Temp | Limits (-40°C to 85°C) | | | Unit |
|--------------------|--|---|---------------------|------|------------------------|-------------|-----|------|
| | | | | | Min | Typ (Note1) | Max | |
| t _{ON} | Turn On Time | V _{IS} =0.8V | 3.0 to 3.6 | Full | | 13 | 30 | ns |
| t _{OFF} | Turn Off Time | V _{IS} =0.8V | 3.0 to 3.6 | Full | | 12 | 25 | ns |
| t _{BBM} | Break Before Make Time (Note 4) | V _{IS} =0.8V | 3.0 to 3.6 | Full | 2 | 4.7 | 6.5 | ns |
| t _{PD} | Propagation Delay | C _L =10pF | 3.0 to 3.6 | Full | | 0.25 | | ns |
| t _{SK(O)} | Channel to Channel Skew | C _L =10pF | 3.0 to 3.6 | | | 0.05 | | ns |
| O _{IRR} | Off Isolation | R _L =50Ω, f=250MHz | 3.0 to 3.6 | Full | | -25 | | dB |
| X _{TALK} | Crosstalk | R _L =50Ω, f=250MHz | 3.0 to 3.6 | Full | | -48 | | dB |
| BW | -3dB Bandwidth | R _L =50Ω | 3.0 to 3.6 | Full | | 550 | | MHz |
| Capacitance | | | | | | | | |
| C _{IN} | Control Pin Input Capacitance (Note 5) | V _{CC} =0V | | | | 2.5 | | pF |
| C _{OFF} | HSD+ HSD- Off Capacitance (Note 5) | V _{CC} =V _{IS} =3.3V, OE=3.3V | | | | 4.5 | | pF |
| C _{ON} | HSD+ HSD- ON Capacitance (Note 5) | V _{CC} =3.3V, OE=0V | | | | 7.0 | | pF |

Note 4: Guaranteed by design.


Note 5: T_A=+25°C, f=1MHz, Capacitance is characterized but not tested in production.

Typical Performance Characteristics

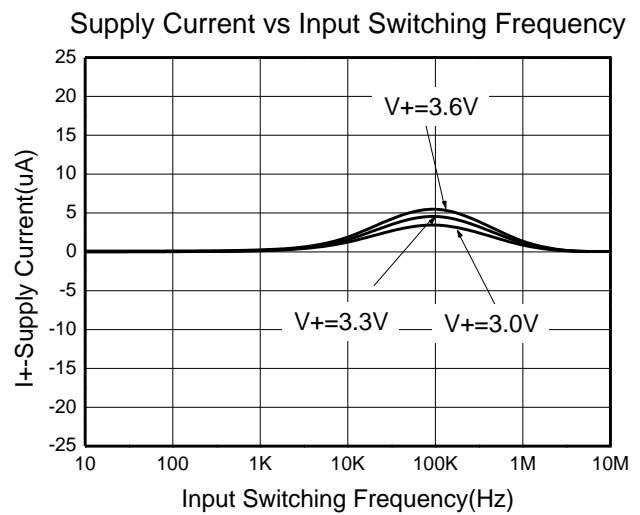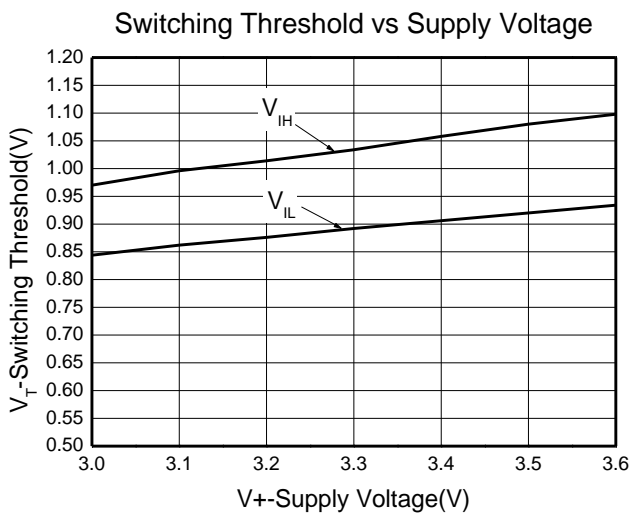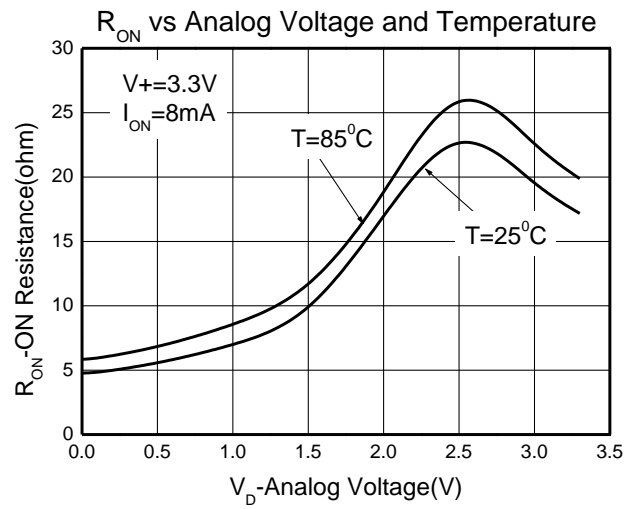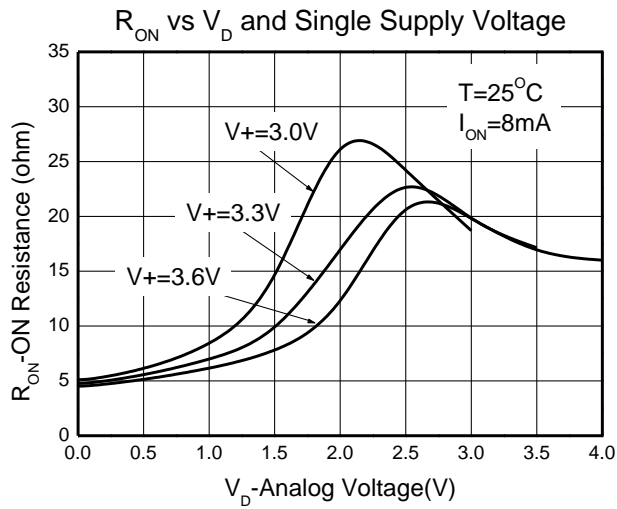


Typical Performance Characteristics (Continued)

Bandwidth

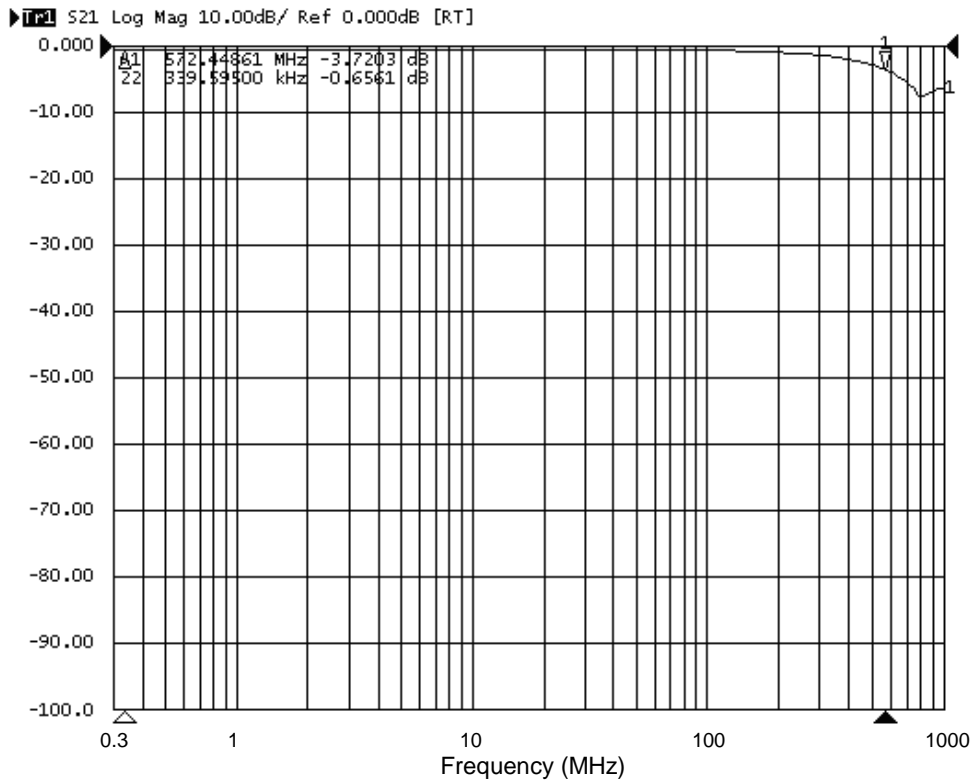


Off Isolation

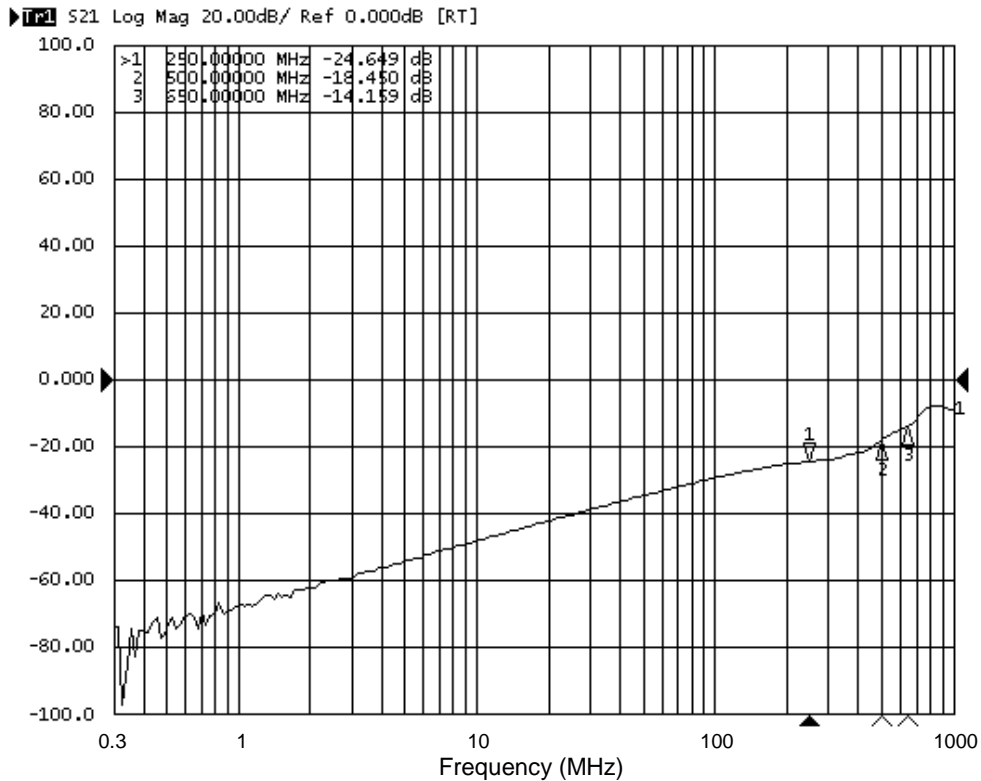

Typical Performance Characteristics (Continued)

Crosstalk

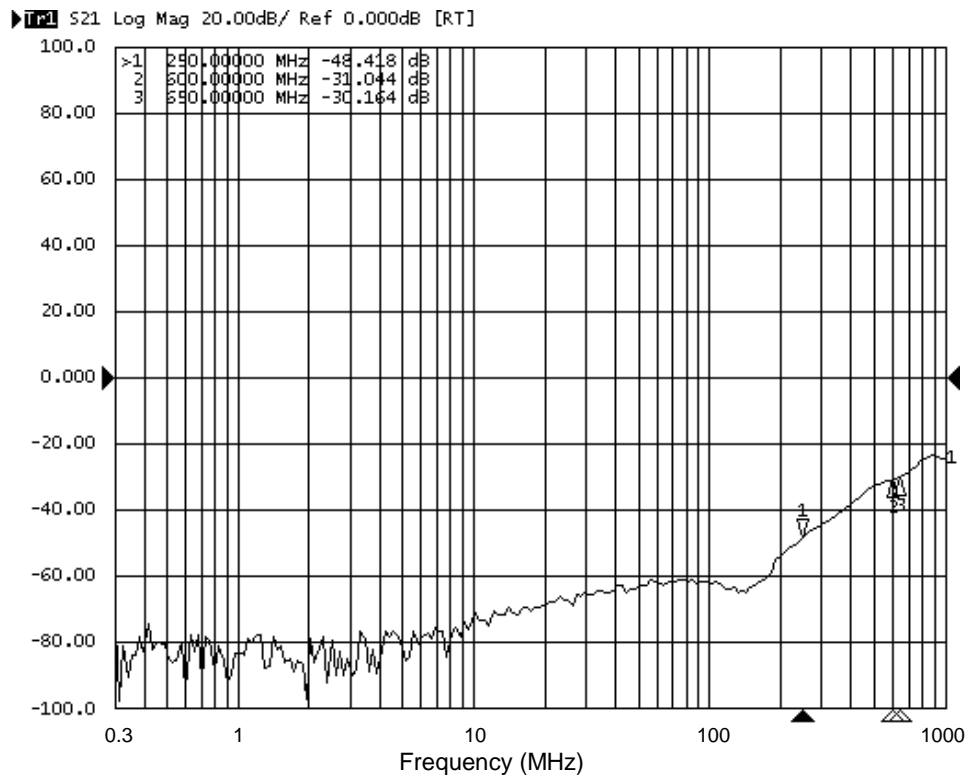

Applications Information

Power-Off Protection

For a VBUS short circuit, the switch is expected to withstand such a condition for at least 24 hours. The UM7222 has specially designed circuitry which prevents unintended signal bleed through as well as guaranteed system reliability during a power-down, over-voltage condition. The protection has been added to the common pins (D+, D-).


Power-On Protection

The USB 2.0 specification also notes that the USB device should be capable of withstanding a VBUS short during transmission of data. This modification works by limiting current flow back into the V+ rail during the over-voltage event so current remains within the safe operating range. In this application, the switch passes the full 5.25V input signal through to the selected output while maintaining specified off isolation on the un-selected pins.


Package Information

UM7222MA MSOP10

Outline Drawing

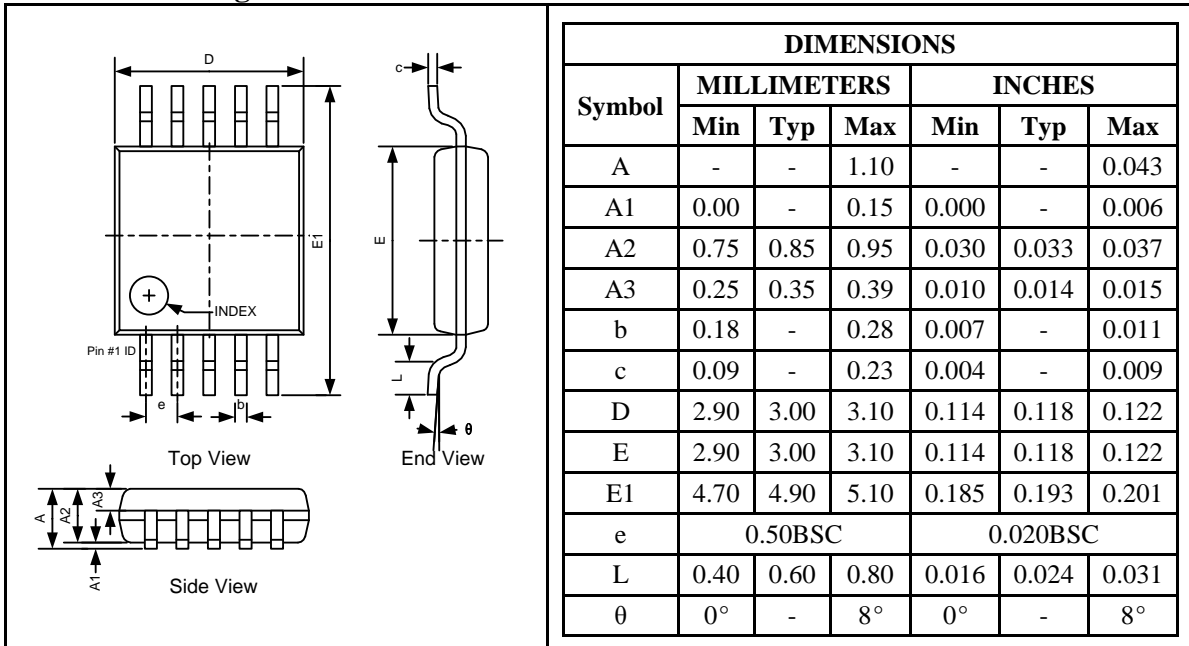

Land Pattern

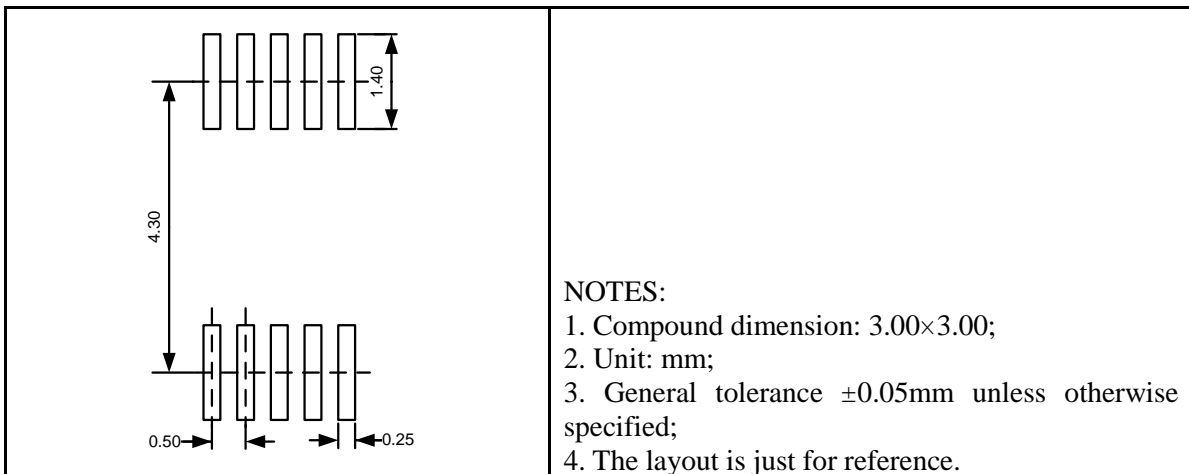


Tape and Reel Orientation




UM7222 QFN10 1.8×1.4

Outline Drawing

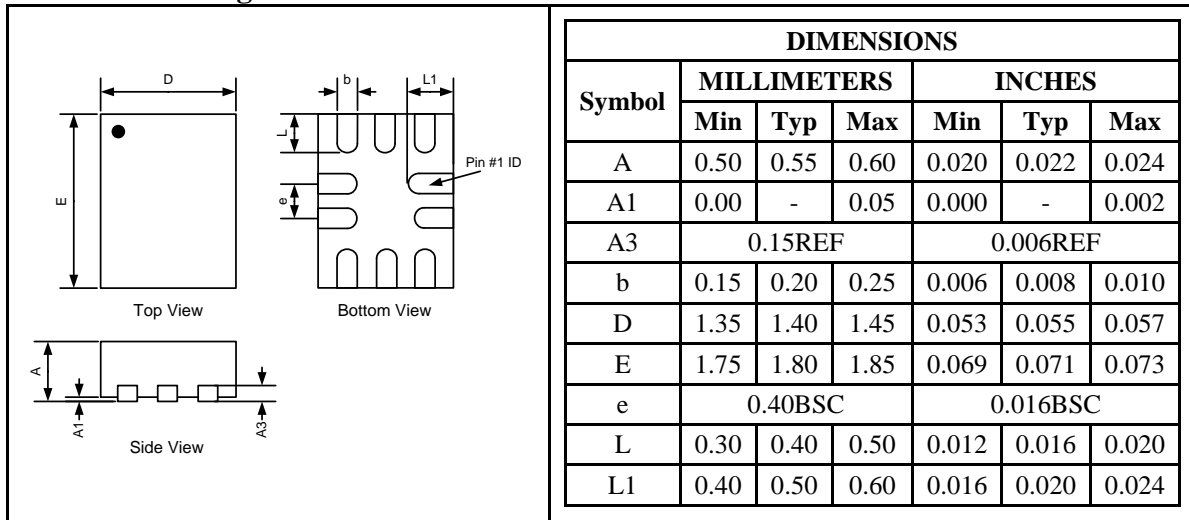

Land Pattern

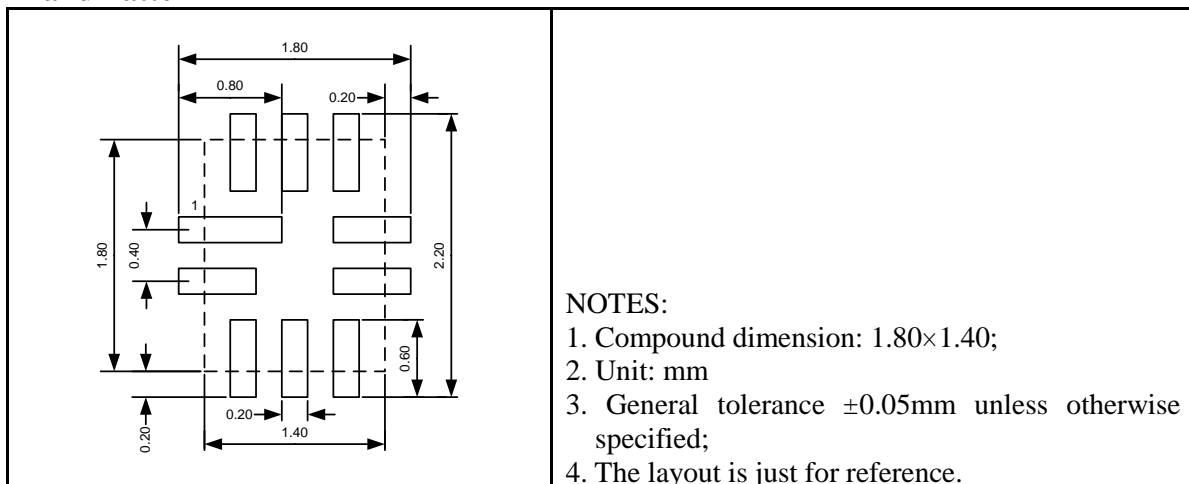


Tape and Reel Orientation




UM7222A QFN10 2.1×1.6


Outline Drawing

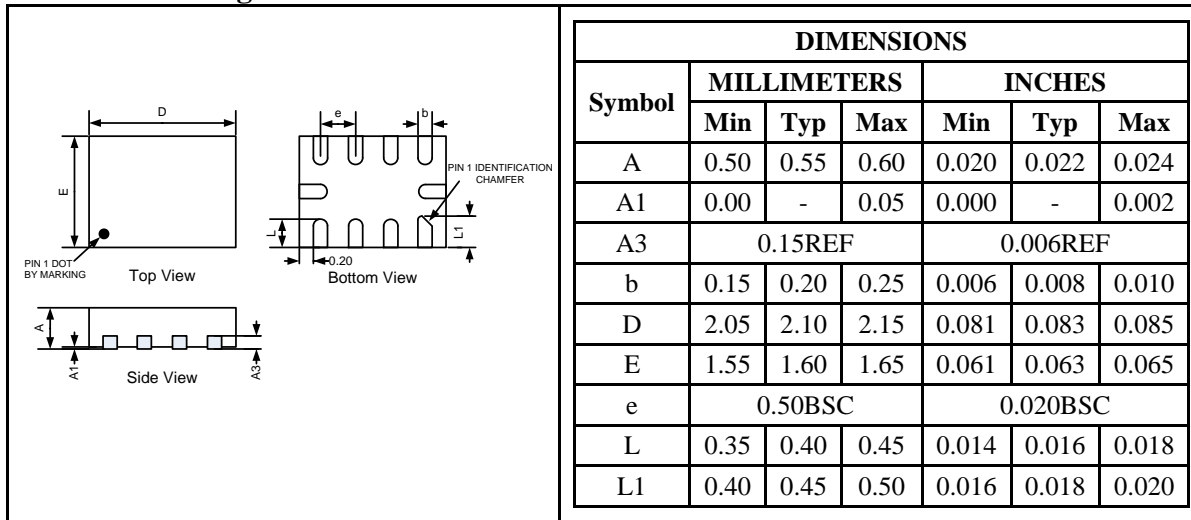

Land Pattern

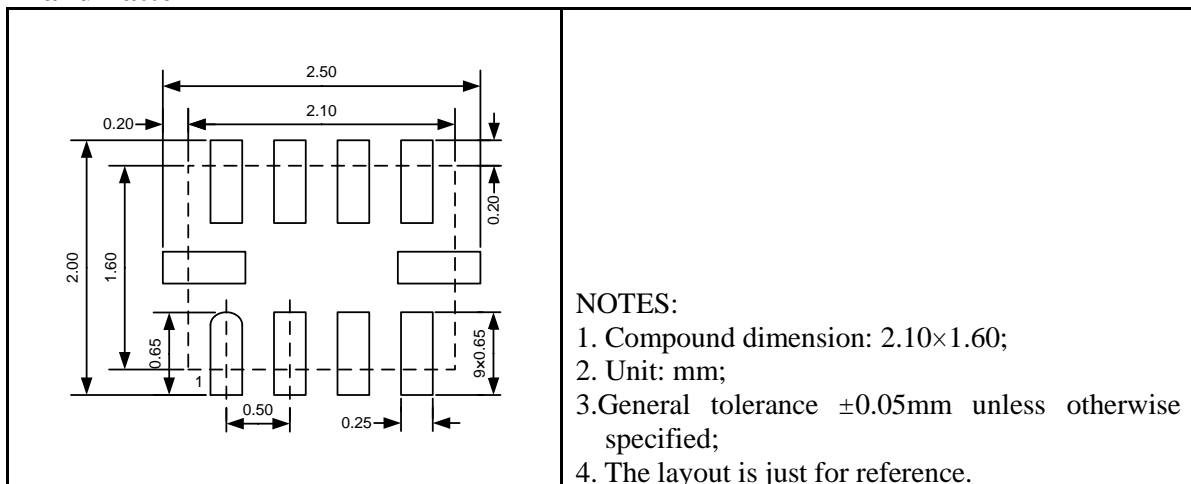

Tape and Reel Orientation

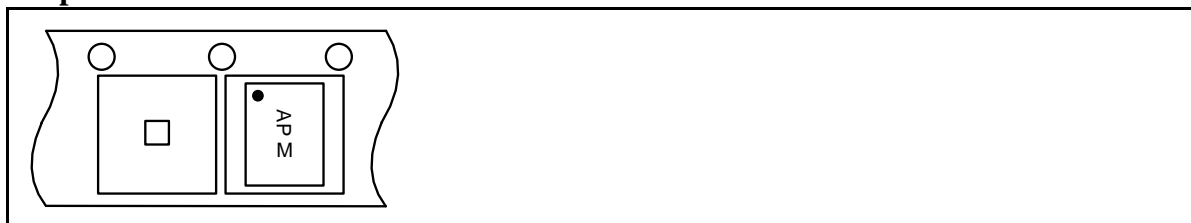

GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.