

Dual -Bit Dual-Supply Bus Transceiver With Configurable Voltage Translation and 3-State Outputs

UM3602V8 VSSOP8

General Description

The UM3602 is a dual-supply, dual-bit non-inverting bus transceiver that is optimized to operate with V_{CCA} and V_{CCB} set at 1.65V to 5.5V. The A port is designed to track V_{CCA} which accepts any supply voltage from 1.65V to 5.5V. The B port is designed to track V_{CCB} which accepts any supply voltage from 1.65V to 5.5 V. This allows for universal low-voltage bidirectional translation between any of the 1.8V, 2.5V, 3.3V, and 5.5V voltage nodes.

The UM3602 is designed for asynchronous communication between two data buses. The logic levels of the direction-control (DIR) input activate either the B-port output and the A-port outputs. The device transmits data from the A bus to the B bus when the B-port outputs are activated, and from the B bus to the A bus when the A-port outputs are activated. The input circuitry on both A and B ports is always active and must have a logic HIGH or LOW level applied to prevent excess I_{CC} and I_{CCZ} .

In the design of the UM3602, the control pin (DIR) is supplied by V_{CCA} .

The UM3602 is available in VSSOP8 package.


Applications

- Personal Electronic
- Industrial
- Enterprise
- Telecom


Features

- Control Inputs V_{IH}/V_{IL} Levels Are Referenced to V_{CCA} Voltage
- V_{CC} Isolation Feature – If Either V_{CC} Input Is at GND, All Are in the High-Impedance State
- Fully Configurable Dual-Rail Design Allows Each Port to Operate Over the Full 1.65V to 5.5V Power-Supply Range
- Low Power Consumption, 10- μ A Max I_{CC}
- ± 24 -mA Output Drive at 3.3 V
- Available in VSSOP8 Package
- Max Data Rates
150 Mbps($V_{CCA} < 3.3$ V or $V_{CCB} < 3.3$ V)
220 Mbps($V_{CCA} \geq 3.3$ V and $V_{CCB} \geq 3.3$ V)

Logic Diagram (Positive Logic)

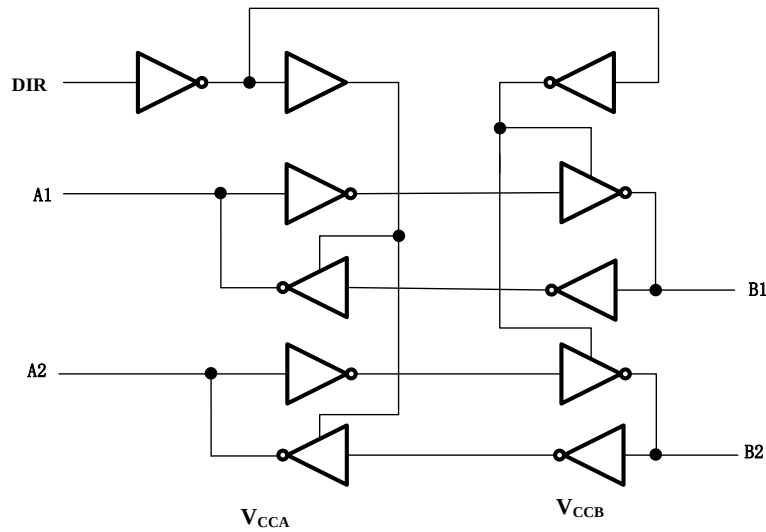

Pin Configurations

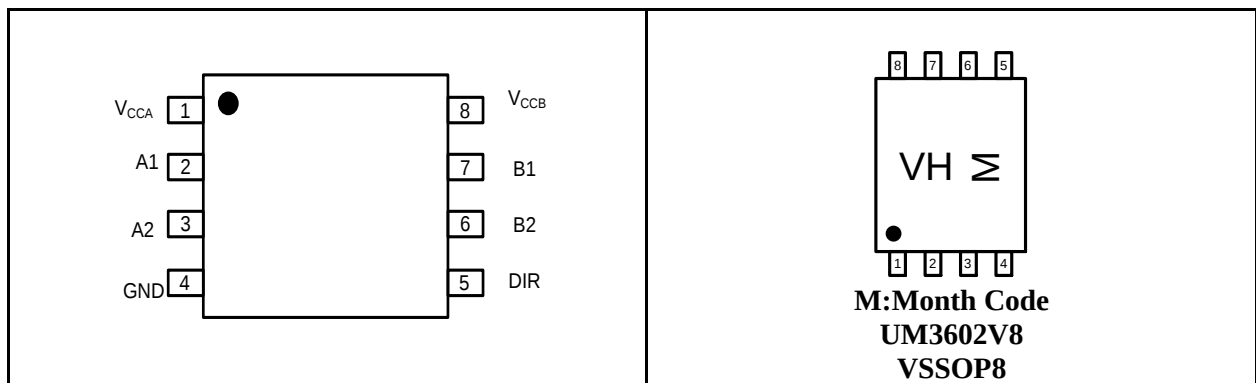

Pin Descriptions

Pin No.	Pin Name	Function
1	V _{CCA}	A-port supply voltage. $1.65\text{ V} \leq V_{CCA} \leq 5.5\text{ V}$.
2	A1	Input/output A1. Referenced to V _{CCA}
3	A2	Input/output A2. Referenced to V _{CCA}
4	GND	Ground.
5	DIR	Direction-control signal.
6	B2	Input/output B2. Referenced to V _{CCB} .
7	B1	Input/output B1. Referenced to V _{CCB}
8	V _{CCB}	B-port supply voltage. $1.65\text{ V} \leq V_{CCB} \leq 5.5\text{ V}$.

Ordering Information

Part Number	Marking	Package Type	Shipping Qty
UM3602V8	VH	VSSOP8	3000pcs/7Inch Tape&Reel

Absolute Maximum Ratings (Note 1)

Over operating free-air temperature range (unless otherwise noted)

Symbol	Parameter		Value	Unit
V_{CCA}	Supply Voltage Range		-0.5 to +6.5	V
V_{CCB}	Supply Voltage Range		-0.5 to +6.5	V
V_I	Input Voltage Range (Note 2)	A ports	-0.5 to +6.5	V
		B ports	-0.5 to +6.5	
V_O	Voltage Range Applied to Any Output in the High-Impedance or Power-Off State (Note 2)	A ports	-0.5 to +6.5	V
		B ports	-0.5 to +6.5	
V_O	Voltage Range Applied to Any Output in the High or Low State (Note 2, 3)	A ports	-0.5 to ($V_{CCA}+0.5$)	V
		B ports	-0.5 to ($V_{CCB}+0.5$)	
I_{IK}	Input Clamp Current	$V_I < 0$	-50	mA
I_{OK}	Output Clamp Current	$V_O < 0$	-50	mA
I_O	Continuous Output Current		± 50	mA
	Continuous Current through V_{CCA} , V_{CCB} , or GND		± 100	mA
θ_{JA}	Package Thermal Impedance		329.4	°C/W
T_{OP}	Operating Temperature Range		-40 to +125	°C
T_{STG}	Storage Temperature Range		-65 to +150	°C
T_J	Junction Temperature		-40 to +125	°C

Note 1: Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Note 2: The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

Note 3: The value of V_{CCA} and V_{CCB} are provided in the recommended operating conditions table.

ESD Rating

Symbol	Parameter	Value	Unit
ESD Protection	Human body model (HBM)	± 4000	V

Recommended Operating Conditions (Note 1, 2,3,4)

Symbol	Parameter		V _{CCI}	V _{CCO}	Min	Max	Unit
V _{CCA}	Supply Voltage				1.65	5.5	V
V _{CCB}					1.65	5.5	
V _{IH}	High Level Input Voltage	Data Inputs ⁽⁵⁾	1.65 V to 1.95 V		V _{CCI} × 0.65		V
			2.3 V to 2.7 V		1.7		
			3 V to 3.6 V		2		
			4.5 V to 5.5 V		V _{CCI} × 0.7		
V _{IL}	Low Level Input Voltage	Data Inputs ⁽⁵⁾	1.65 V to 1.95 V		V _{CCI} × 0.35		V
			2.3 V to 2.7 V		0.7		
			3 V to 3.6 V		0.8		
			4.5 V to 5.5 V		V _{CCI} × 0.3		
V _{IH}	High Level Input Voltage	Control inputs (referenced to V _{CCA}) ⁽⁶⁾	1.65 V to 1.95 V		V _{CCI} × 0.65		V
			2.3 V to 2.7 V		1.7		
			3 V to 3.6 V		2		
			4.5 V to 5.5 V		V _{CCI} × 0.7		
V _{IL}	Low Level Input Voltage	Control inputs (referenced to V _{CCA}) ⁽⁶⁾	1.65 V to 1.95 V		V _{CCI} × 0.35		V
			2.3 V to 2.7 V		0.7		
			3 V to 3.6 V		0.8		
			4.5 V to 5.5 V		V _{CCI} × 0.3		
V _I	Input voltage	Control Inputs			0	5.5	V
V _{I/O}	Input/output voltage	Active state			0	V _{CCO}	V
		Three-State			0	5.5	
I _{OH}	High-level output current			1.65 V to 1.95 V		-4	mA
				2.3 V to 2.7 V		-8	
				3 V to 3.6 V		-24	
				4.5 V to 5.5 V		-32	
I _{OL}	Low-level output current			1.65 V to 1.95 V		4	mA
				2.3 V to 2.7 V		8	
				3 V to 3.6 V		24	
				4.5 V to 5.5 V		32	
Δt/ΔV	Input Transition Rise or Fall Time	Data Inputs	1.65 V to 1.95 V			20	ns/V
			2.3 V to 2.7 V			20	
			3 V to 3.6 V			10	
			4.5 V to 5.5 V			5	

Note 1: V_{CCI} is the V_{CC} associated with the data input port.

Note 2: V_{CCO} is the V_{CC} associated with the output port.

Note 3: All unused or driven (floating) data inputs (I/Os) of the device must be held at logic HIGH or LOW (preferably V_{CCI} or GND) to ensure proper device operation and minimize power.

Note 4: All unused control inputs must be held at V_{CCA} or GND to ensure proper device operation and minimize power consumption.

Note 5: For V_{CCI} values not specified in the data sheet, V_{IH} min = V_{CCI} × 0.7 V, V_{IL} max = V_{CCI} × 0.3 V.

Note 6: For V_{CCA} values not specified in the data sheet, V_{IH} min = V_{CCA} × 0.7 V, V_{IL} max = V_{CCA} × 0.3 V.

Electrical Characteristics (Note 1, 2)

Over recommended operating free-air temperature range (unless otherwise noted)

Parameter		Test Conditions	V _{CCA}	V _{CCB}	T _A =25 °C		-40 °C to 125 °C		Unit
					Typ	Max	Min	Max	
V _{OH}		I _{OH} =-100μA, V _I =V _{IH}	1.65V to 4.5V	1.65V to 4.5V			V _{CCO} -0.1		V
		I _{OH} =-4mA, V _I =V _{IH}	1.65V	1.65V			1.2		
		I _{OH} =-8mA, V _I =V _{IH}	2.3V	2.3V			1.9		
		I _{OH} =-24mA, V _I =V _{IH}	3V	3V			2.4		
		I _{OH} =-32mA, V _I =V _{IH}	4.5V	4.5V			3.8		
V _{OL}		I _{OL} =100μA, V _I =V _{IL}	1.65V to 4.5V	1.65V to 4.5V			0.1		V
		I _{OL} =4mA, V _I =V _{IL}	1.65V	1.65V			0.45		
		I _{OL} =8mA, V _I =V _{IL}	2.3V	2.3V			0.3		
		I _{OL} =24mA, V _I =V _{IL}	3V	3V			0.55		
		I _{OL} =32mA, V _I =V _{IL}	4.5V	4.5V			0.55		
I _I	DIR	V _I = V _{CCA} or GND	1.65V to 5.5V	1.65V to 5.5V	±1		±2	μA	
I _{off}	A or B Port	V _I or V _O = 0 to 5.5 V	0V	0V to 5.5V	±1		±9	μA	
			0V to 5.5V	0V	±1		±9		
I _{OZ}	A or B Port	V _O = V _{CCO} or GND	1.65V to 5.5V	1.65V to 5.5V	±1		±9	μA	
I _{CCA}		V _I =V _{CCI} or GND I _O =0	1.65V to 5.5V	1.65 V to 5.5 V			4	μA	
			5 V	0 V			2		
			0 V	5 V			-12		
I _{CCB}		V _I =V _{CCI} or GND I _O =0	1.65V to 5.5V	1.65 V to 5.5 V			4	μA	
			5 V	0 V			-12		
			0 V	5 V			2		
I _{CCA} +I _{CCB}		V _I =V _{CCI} or GND I _O =0	1.65V to 5.5V	1.65V to 5.5V			4	μA	
ΔI _{CCA}	A port	One A port at V _{CCA} – 0.6 V, DIR at V _{CCA} , B port = open	3V to 5.5V	3V to 5.5V			50	μA	
	DIR	DIR at V _{CCA} – 0.6 V, B port = open, A port at V _{CCA} or GND					50		
ΔI _{CCB}	B port	One B port at V _{CCB} – 0.6 V, DIR at GND, A port = open	3V to 5.5V	3V to 5.5V			50	μA	
C _i	DIR	V _I =V _{CCI} or GND	3.3V	3.3V	2.5			pF	
C _{iO}	A or B Port	V _O = V _{CCA/B} or GND	3.3V	3.3V	6			pF	

 Note 1: V_{CCI} is the supply voltage associated with the input port.

 Note 2: V_{CCO} is the supply voltage associated with the output port.

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CCA} = 1.8V \pm 0.15V$ (unless otherwise noted)

Parameter	From (Input)	To (Output)	$V_{CCB}=1.8V \pm 0.15V$		$V_{CCB}=2.5V \pm 0.2V$		$V_{CCB}=3.3 \pm 0.3V$		$V_{CCB}=5V \pm 0.5V$		Unit
			Min	Max	Min	Max	Min	Max	Min	Max	
t_{PLH}	A	B	3	21.7	2.2	14.3	1.7	12.3	1.4	11.2	ns
t_{PHL}			2.8	28.3	2.2	12.5	1.8	11.1	1.7	11	
t_{PLH}	B	A	3	21.7	2.3	20	2.1	19.5	1.9	19.1	ns
t_{PHL}			2.8	18.3	2.1	16.9	2	16.6	1.8	16.2	
t_{PHZ}	DIR	A	10.6	34.9	9.3	34.5	8.6	34.5	10.7	33.3	ns
t_{PLZ}			7.3	23.7	7.5	23.6	7.5	23.5	7	23.4	
t_{PHZ}	DIR	B	7.1	31.9	6.9	18.9	6.5	15.3	4.1	12.6	ns
t_{PLZ}			6.5	23.5	6.5	16.6	4.3	13.7	2.1	11.1	
t_{PZH}	DIR	A		45.2		36.6		33.2		30.2	ns
t_{PZL}				50.2		35.8		31.9		28.8	
t_{PZH}	DIR	B		45.4		37.9		35.8		34.6	ns
t_{PZL}				53.2		47		45.6		44.3	

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CCA} = 2.5V \pm 0.2V$ (unless otherwise noted)

Parameter	From (Input)	To (Output)	$V_{CCB}=1.8V \pm 0.15V$		$V_{CCB}=2.5V \pm 0.2V$		$V_{CCB}=3.3 \pm 0.3V$		$V_{CCB}=5V \pm 0.5V$		Unit
			Min	Max	Min	Max	Min	Max	Min	Max	
t_{PLH}	A	B	2.3	20	1.5	12.5	1.3	10.4	1.1	9.1	ns
t_{PHL}			2.1	16.9	1.4	11.5	1.3	9.4	0.9	8.6	
t_{PLH}	B	A	2.2	14.3	1.5	12.5	1.4	12	1	11.5	ns
t_{PHL}			2.2	12.5	1.4	11.5	1.3	11	0.9	10.2	
t_{PHZ}	DIR	A	6.6	21.1	7.1	20.8	6.8	20.8	5.2	20.5	ns
t_{PLZ}			5.3	16.6	5.2	16.5	4.9	16.3	4.8	16.3	
t_{PHZ}	DIR	B	6.2	31.9	5.3	17.9	5.8	14.5	3.5	11.6	ns
t_{PLZ}			5.8	22.9	5.5	15.2	3.6	12.9	1.4	11.2	
t_{PZH}	DIR	A		37.2		27.7		24.9		21.7	ns
t_{PZL}				44.4		29.4		25.5		21.8	
t_{PZH}	DIR	B		28.6		29		26.7		25.4	ns
t_{PZL}				38		32.3		30.2		29.1	

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CCA} = 3.3V \pm 0.3V$ (unless otherwise noted)

Parameter	From (Input)	To (Output)	$V_{CCB}=1.8V$ $\pm 0.15V$		$V_{CCB}=2.5V$ $\pm 0.2 V$		$V_{CCB}=3.3$ $\pm 0.3V$		$V_{CCB}=5V$ $\pm 0.5V$		Unit
			Min	Max	Min	Max	Min	Max	Min	Max	
t_{PLH}	A	B	2.1	19.5	1.4	12	0.7	9.6	0.7	8.4	ns
t_{PHL}			2	16.6	1.3	11	0.8	9	0.7	8	
t_{PLH}	B	A	1.7	12.3	1.3	10.4	0.7	9.8	0.6	9.4	ns
t_{PHL}			1.8	11.1	1.3	9.4	0.8	9	0.7	8.5	
t_{PHZ}	DIR	A	5	14.9	5.1	14.8	5	14.8	5	14.4	ns
t_{PLZ}			3.4	12.4	3.7	12.4	3.9	12.1	3.3	11.8	
t_{PHZ}	DIR	B	5.0	31.3	5.0	17.7	4.9	14.4	2.9	11.4	ns
t_{PLZ}			5.6	21.7	5.6	15.3	4.3	12.3	1	9.6	
t_{PZH}	DIR	A		34		25.7		22.1		19	ns
t_{PZL}				42.4		27.1		23.4		19.9	
t_{PZH}	DIR	B		31.9		24.4		21.9		20.2	ns
t_{PZL}				31.5		25.8		23.8		22.4	

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CCA} = 5V \pm 0.5V$ (unless otherwise noted)

Parameter	From (Input)	To (Output)	$V_{CCB}=1.8V$ $\pm 0.15V$		$V_{CCB}=2.5V$ $\pm 0.2 V$		$V_{CCB}=3.3$ $\pm 0.3V$		$V_{CCB}=5V$ $\pm 0.5V$		Unit
			Min	Max	Min	Max	Min	Max	Min	Max	
t_{PLH}	A	B	1.9	19.1	1	11.5	0.6	9.4	0.5	7.9	ns
t_{PHL}			1.8	16.2	0.9	10.2	0.7	8.5	0.5	7.5	
t_{PLH}	B	A	1.4	11.2	1	9.1	0.7	8.4	0.5	7.9	ns
t_{PHL}			1.7	11	0.9	8.6	0.7	8	0.5	7.5	
t_{PHZ}	DIR	A	2.9	12.2	2.9	11.9	2.8	11.9	2.2	11.8	ns
t_{PLZ}			1.4	10.9	1.3	10.7	0.7	10.7	0.7	10.6	
t_{PHZ}	DIR	B	4.5	30.1	4.3	17.9	4.3	14.1	1.3	11.3	ns
t_{PLZ}			5.9	20.9	5	15	4	11.7	1	9.6	
t_{PZH}	DIR	A		32.1		24.1		20.1		18.5	ns
t_{PZL}				41.1		26.5		22.1		18.8	
t_{PZH}	DIR	B		30		22.2		20.1		18.5	ns
t_{PZL}				28.4		22.1		22.4		19.3	

Operating Characteristics

$T_A=25^\circ C$


Parameter		Test Conditions	$V_{CCA}= V_{CCB}$ $=1.8V$	$V_{CCA}=$ $V_{CCB}=2.5V$	$V_{CCA}= V_{CCB}$ $=3.3V$	$V_{CCA}=$ $V_{CCB}=5V$	Unit
			TYP	TYP	TYP	TYP	
C_{pdA} (1)	A-port input, B-port output	$C_L = 0,$ $f = 10 \text{ MHz},$ $t_r = t_f = 1 \text{ ns}$	3	4	4	4	pF
	B-port input, A-port output		18	19	20	21	
C_{pdB} (1)	A-port input, B-port output		18	19	20	21	
	B-port input, A-port output		3	4	4	4	

(1) Power dissipation capacitance per transceiver

Typical Characteristics


Typical Propagation Delay (A to B) vs Load Capacitance

$T_A=25\text{ }^{\circ}\text{C}$, $V_{CCA}=1.8\text{V}$

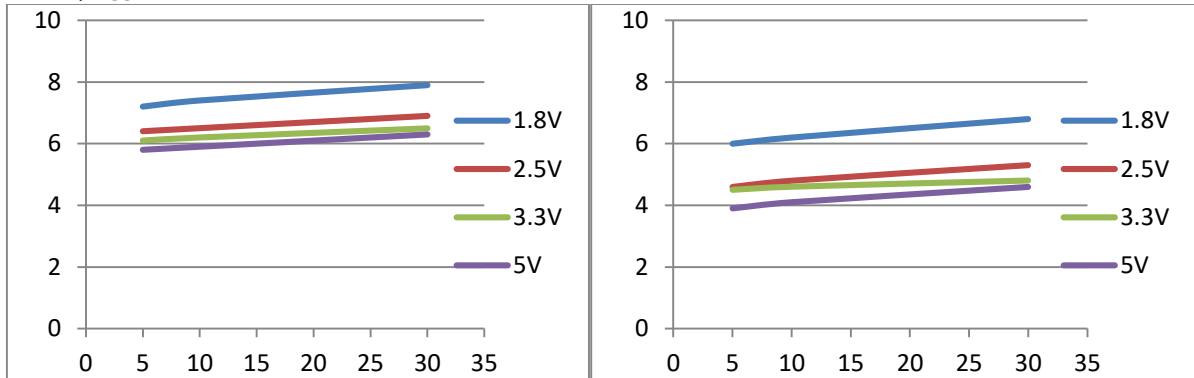


Typical Propagation Delay (B to A) vs Load Capacitance

$T_A=25\text{ }^{\circ}\text{C}$, $V_{CCA}=1.8\text{V}$

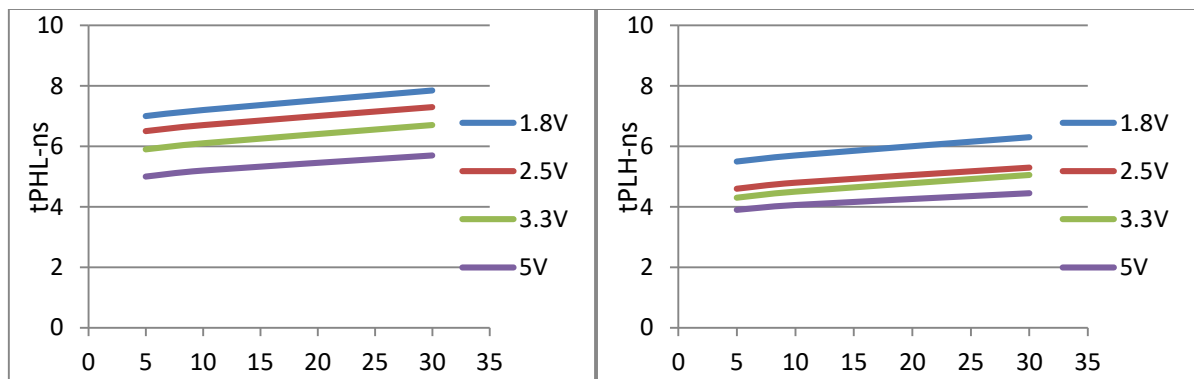


Typical Propagation Delay (A to B) vs Load Capacitance


$T_A=25\text{ }^{\circ}\text{C}$, $V_{CCA}=2.5\text{V}$

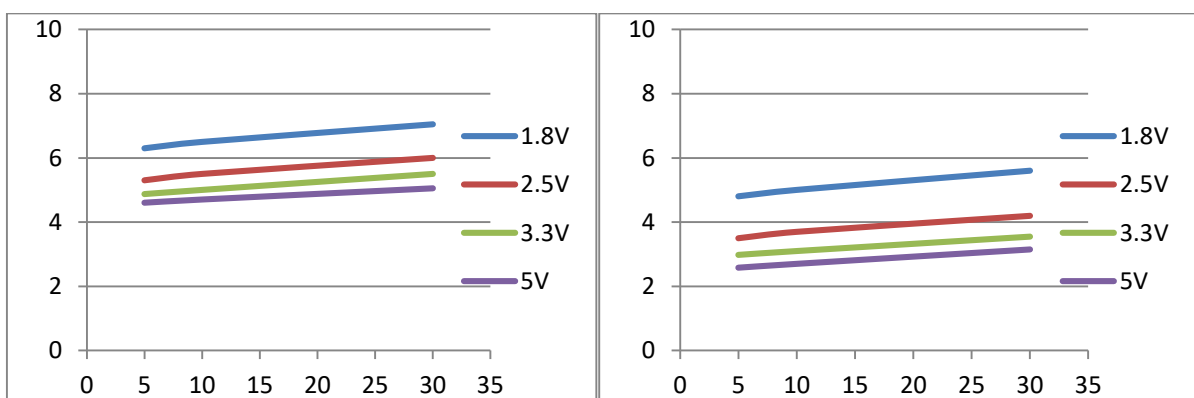


Typical Propagation Delay (B to A) vs Load Capacitance
 $T_A=25\text{ }^{\circ}\text{C}, V_{CCA}=2.5\text{V}$

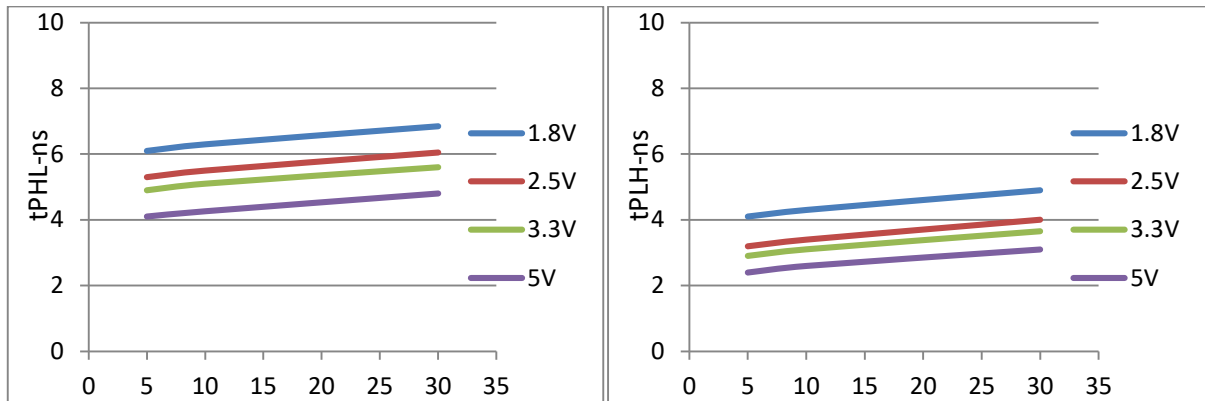


Typical Propagation Delay (A to B) vs Load Capacitance
 $T_A=25\text{ }^{\circ}\text{C}, V_{CCA}=3.3\text{V}$

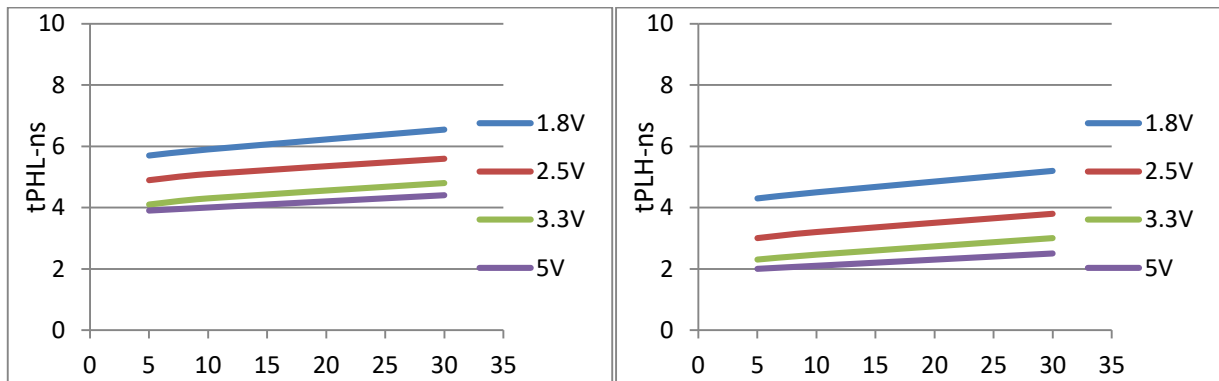


Typical Propagation Delay (B to A) vs Load Capacitance
 $T_A=25\text{ }^{\circ}\text{C}, V_{CCA}=3.3\text{V}$

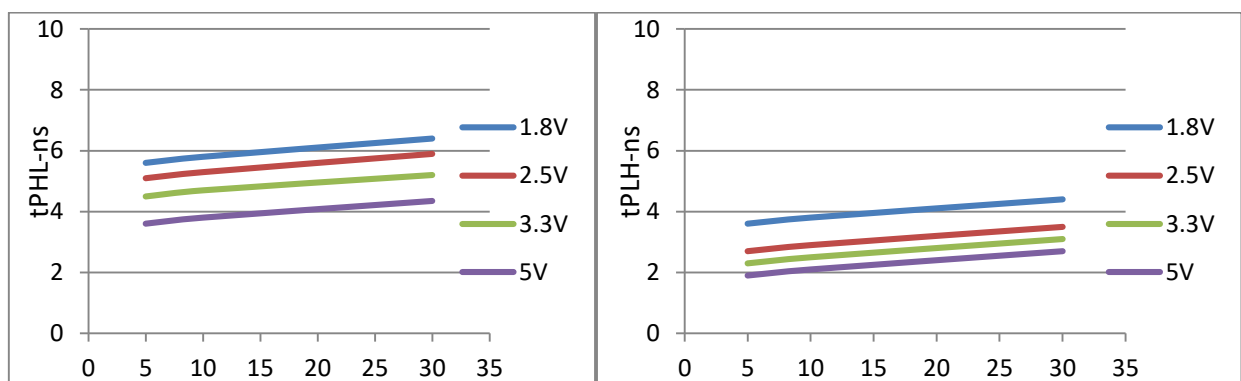


Typical Propagation Delay (A to B) vs Load Capacitance
 $T_A=25\text{ }^{\circ}\text{C}$, $V_{CCA}=5\text{V}$

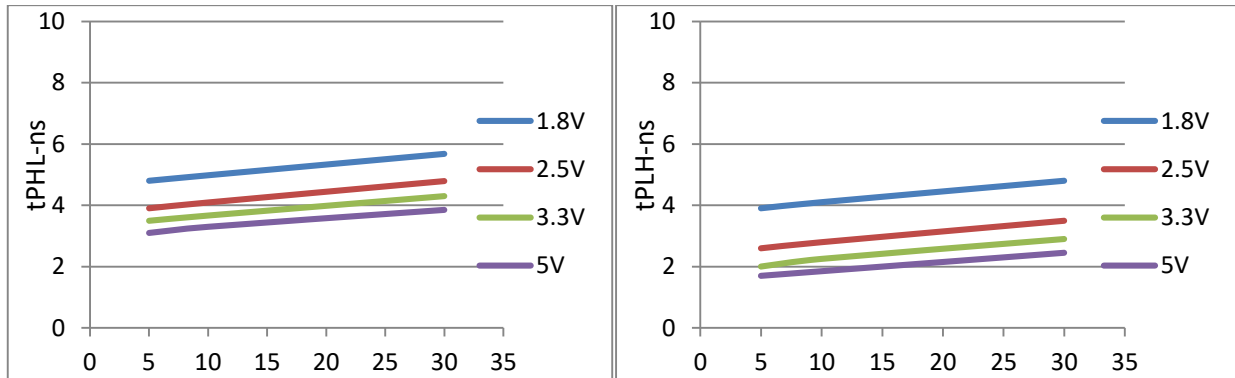

Typical Propagation Delay (B to A) vs Load Capacitance
 $T_A=25\text{ }^{\circ}\text{C}$, $V_{CCA}=5\text{V}$

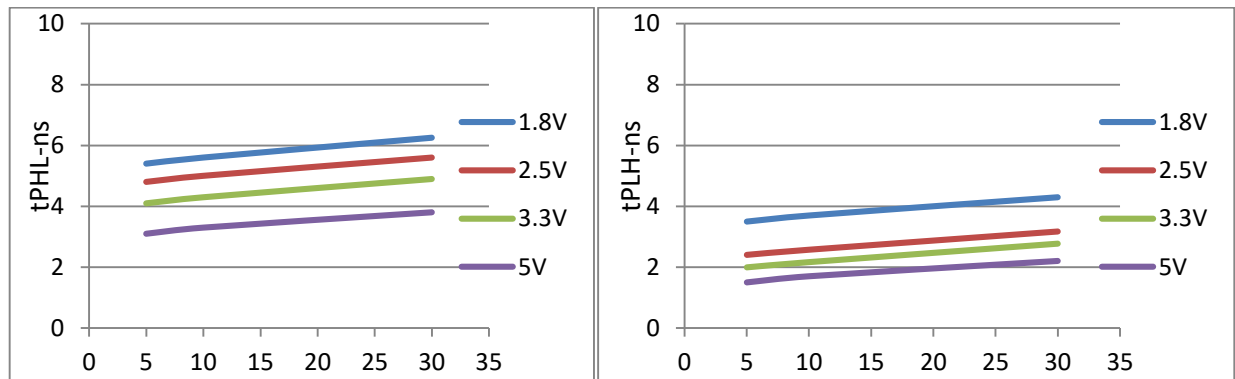


Parameter Measurement Information

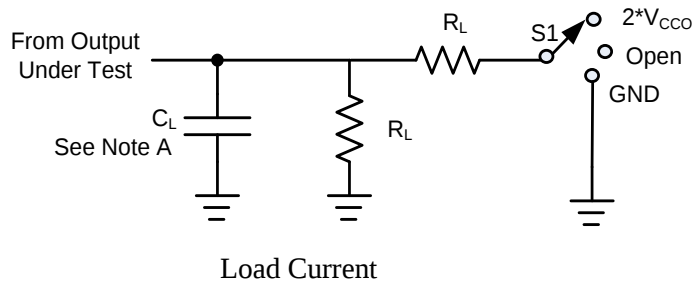


TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	$2 \times V_{CCO}$
t_{PHZ}/t_{PZH}	GND


V_{CCO}	C_L	R_L	V_{TP}
$1.8\text{ V} \pm 0.15\text{ V}$	15PF	$2\text{ k}\Omega$	0.15V
$2.5\text{ V} \pm 0.2\text{ V}$	15PF	$2\text{ k}\Omega$	0.15V
$3.3\text{ V} \pm 0.3\text{ V}$	15PF	$2\text{ k}\Omega$	0.3V
$5\text{ V} \pm 0.5\text{ V}$	15PF	$2\text{ k}\Omega$	0.3V

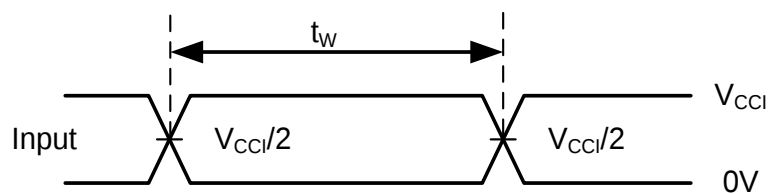

VOLTAGE WAVEFORMS PULSE DURATION

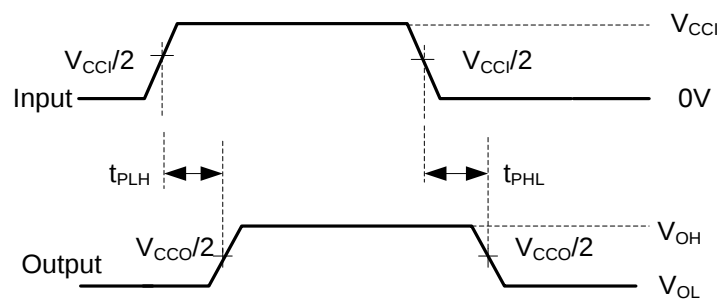

VOLTAGE WAVEFORMS PROPAGATION DELAY TIMES

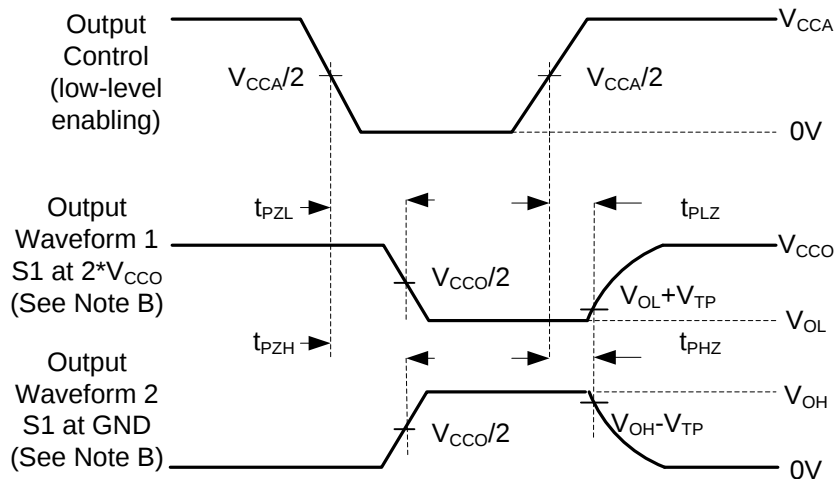

VOLTAGE WAVEFORMS ENABLE AND DISABLE TIMES


NOTES:

- A. C_L includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50\Omega$, $dv/dt \geq 1V/ns$.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- F. t_{PZL} and t_{PZH} are the same as t_{en} .
- G. t_{PLH} and t_{PHL} are the same as t_{pd} .
- H. V_{CCI} is the V_{CC} associated with the input port.
- I. V_{CCO} is the V_{CC} associated with the output port.
- J. All parameters and waveforms are not applicable to all devices.

Detailed Description

The UM3602 is an dual-bit, dual supply non-inverting bus transceiver. Pin A and direction control pin are support by V_{CCA} and pin B is support by V_{CCB} . The A port is able to accept I/O voltages ranging from 1.65 V to 5.5 V, while the B port can accept I/O voltages from 1.65 V to 5.5 V. The high on DIR allows data transmission from A to B and a low on DIR allows data transmission from B to A.

Functional Block Diagram

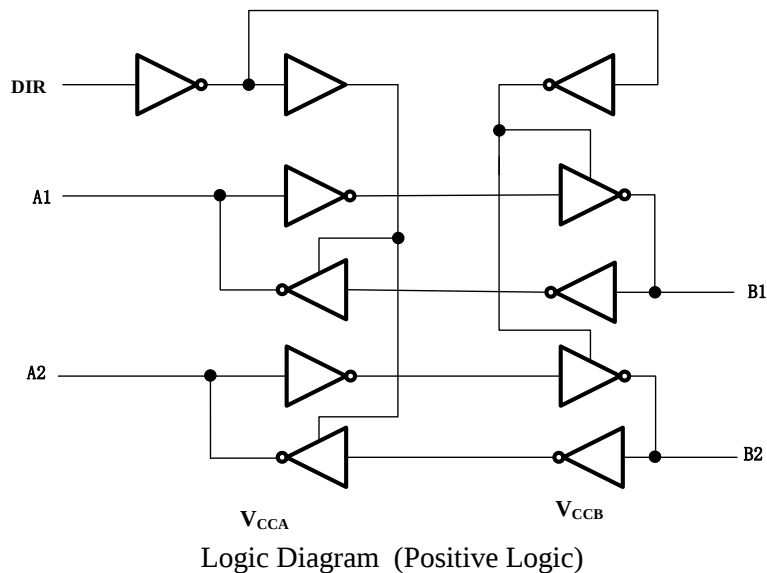

Feature Description

Fully Configurable Dual-Rail Design Allows Each Port to Operate Over the Full 1.65V to 5.5V Power-Supply Range

Both V_{CCA} and V_{CCB} can be supplied at any voltage between 1.65V and 5.5V making the device suitable for translating between any of the voltage nodes (1.8V, 2.5V, 3.3V and 5V).

I_{off} Supports Partial-Power-Down Mode Operation

I_{off} prevents backflow current by disabling I/O output circuits when device is in partial-power-down mode.

Device Functional Modes

The UM3602 is bus transceiver that can operate from 1.65V to 5.5V (V_{CCA}) and 1.65V to 5.5V (V_{CCB}). The signal translation between 1.65V and 5.5V requires direction control and output enable control. When DIR is high, data transmission is from A to B. When DIR is low, data transmission is from B to A.


Table 1. Function Table(1)
(Each Transceiver)

INPUTS DIR	OPERATION
L	B data to A bus
H	A data to B bus

(1) Input circuits of the data I/Os are always active.

Application Information

The UM3602 device can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. The maximum output current can be up to 32 mA when device is powered by 5.5 V.

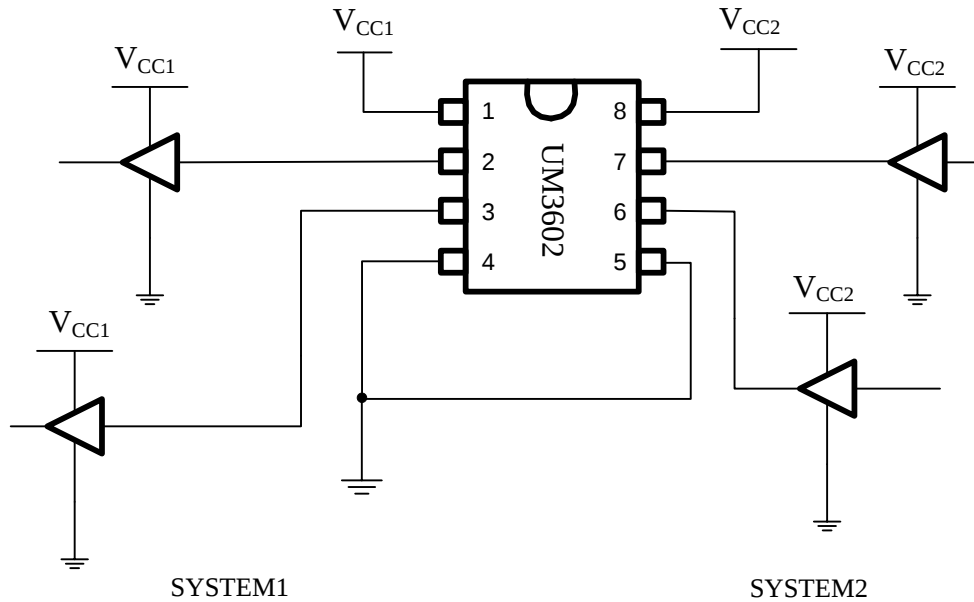


Typical Application Circuit


Package Information

UM3602V8 VSSOP8

Outline Drawing

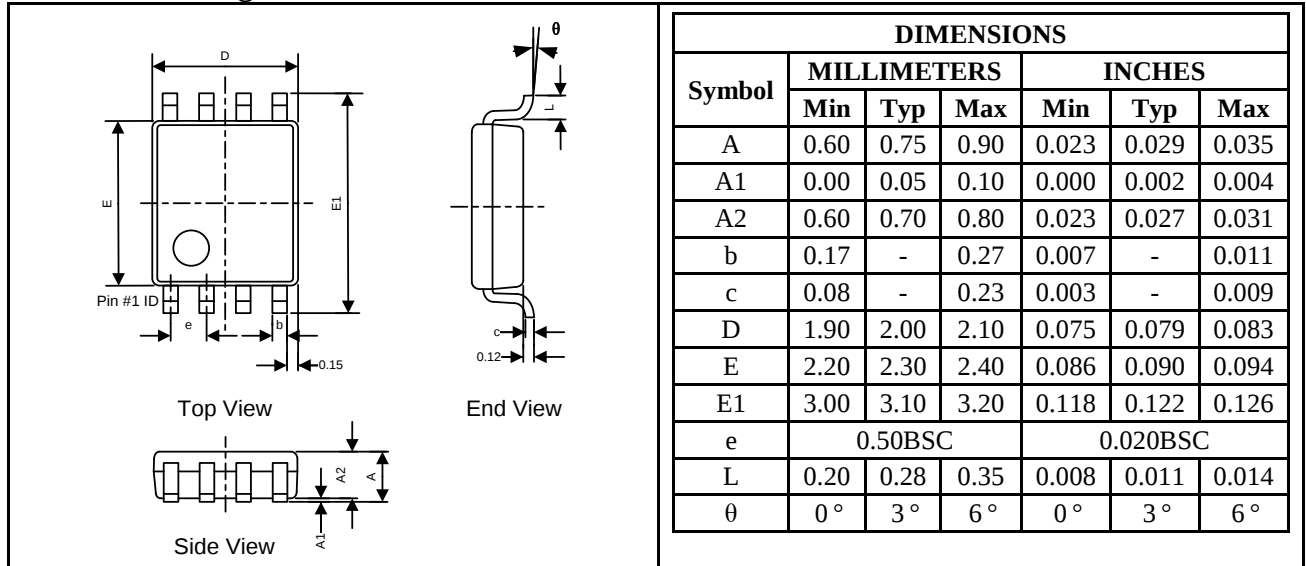


Land Pattern

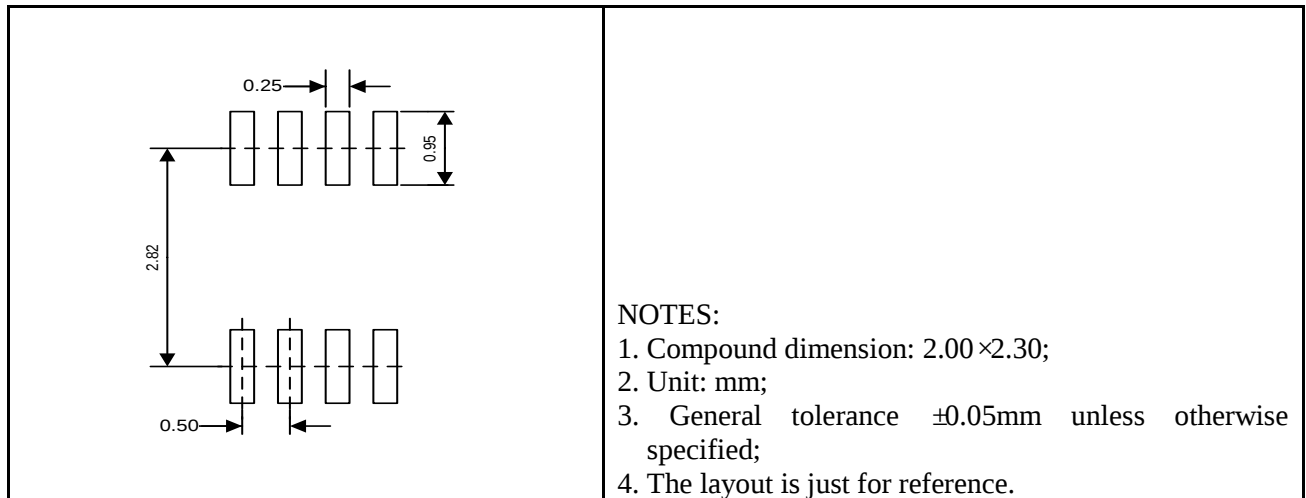

Tape and Reel Orientation



Packing Information

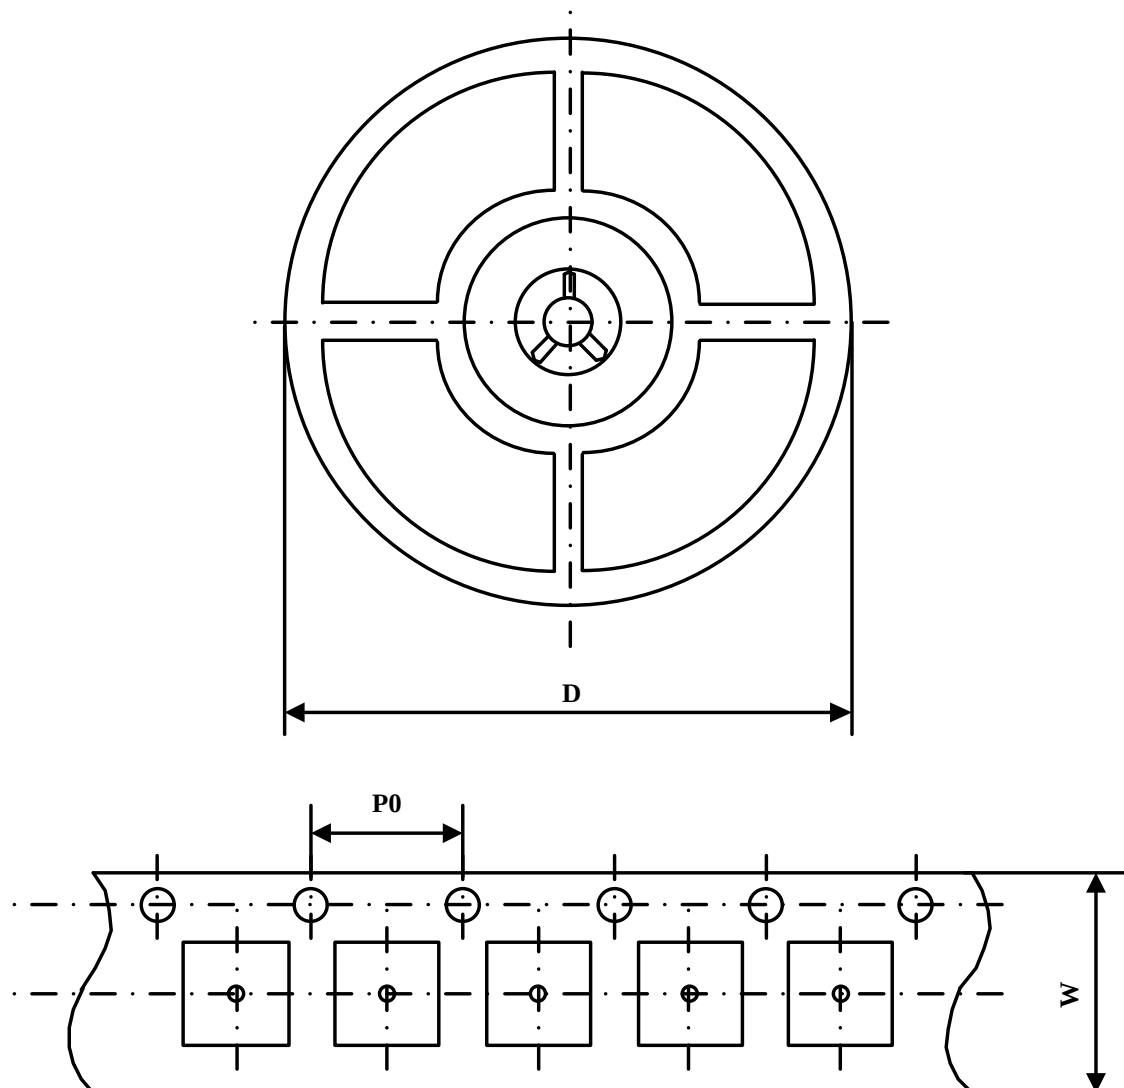

Part Number	Package Type	Carrier Width(W)	Pitch(P0)	Reel Size(D)
UM3602V8	VSSOP8	8 mm	4 mm	180 mm

GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.