

## 300mA, Micropower, VLDO Linear Regulator

**UM365xxS SOT23-3**

**UM365xxP SOT323**

### General Description

The UM365xx series are VLDO (very low dropout) linear regulators designed for low power portable applications. Maximum dropout is just 200mV at the load current of 100mA. The internal P-channel MOSFET pass transistor requires no base current, allowing the device to draw only 90μA during normal operation at the maximum load current of 300mA.

Other features include high output voltage accuracy, under voltage lockout, stability with ultra low ESR ceramic capacitors as small as 1μF, thermal overload protection and output current limiting. The UM365xx series are available in a low profile SOT23-3 or SOT323 package.

### Applications


- Bluetooth/802.11 Cards
- PDAs and Notebook Computers
- Portable Instruments and Battery-Powered Systems
- Cellular Phones

### Features

- Very Low Dropout: 200mV (Max) at 100mA
- Maximum Input Voltage: 6.0V
- Low Noise: 200μV<sub>RMS</sub> (10Hz to 100kHz)
- ±2% Voltage Accuracy at 150mA
- Fixed Output Voltage: 1.2V to 5.0V with 100mV Interval
- Output Current Limit
- Stable with 1μF Output Capacitor
- Thermal Overload Protection
- Low Profile SOT23-3 or SOT323 Package

### Pin Configurations

### Top View

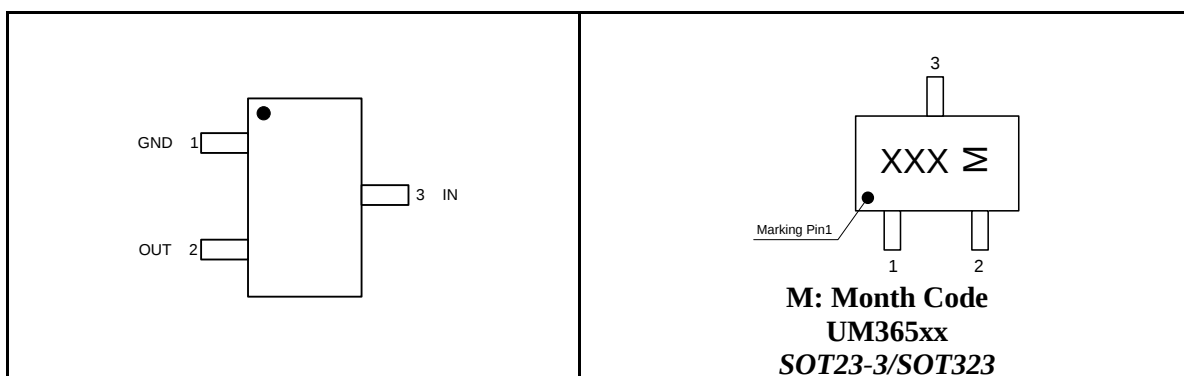

### Pin Description

| Pin Number | Symbol | Function                 |
|------------|--------|--------------------------|
| 1          | GND    | Ground                   |
| 2          | OUT    | Voltage Regulated Output |
| 3          | IN     | Power Supply             |

## Ordering Information

| Part Number | Output Voltage | Packaging Type | Marking Code | Shipping Qty                 |
|-------------|----------------|----------------|--------------|------------------------------|
| UM36512S    | 1.2V           | SOT23-3        | 52D          | 3000pcs/7Inch<br>Tape & Reel |
| UM36513S    | 1.3V           |                | 52E          |                              |
| UM36514S    | 1.4V           |                | 52H          |                              |
| UM36515S    | 1.5V           |                | 52J          |                              |
| UM36516S    | 1.6V           |                | 52L          |                              |
| UM36517S    | 1.7V           |                | 52M          |                              |
| UM36518S    | 1.8V           |                | 52K          |                              |
| UM36519S    | 1.9V           |                | 52F          |                              |
| UM36520S    | 2.0V           |                | 52B          |                              |
| UM36521S    | 2.1V           |                | 52A          |                              |
| UM36522S    | 2.2V           |                | U2C          |                              |
| UM36523S    | 2.3V           |                | U23          |                              |
| UM36524S    | 2.4V           |                | U24          |                              |
| UM36525S    | 2.5V           |                | 52N          |                              |
| UM36526S    | 2.6V           |                | U26          |                              |
| UM36527S    | 2.7V           |                | 52P          |                              |
| UM36528S    | 2.8V           |                | 52Q          |                              |
| UM36529S    | 2.9V           |                | U29          |                              |
| UM36530S    | 3.0V           |                | 52R          |                              |
| UM36531S    | 3.1V           |                | 52S          |                              |
| UM36532S    | 3.2V           |                | 52T          |                              |
| UM36533S    | 3.3V           |                | 53U          |                              |
| UM36534S    | 3.4V           |                | 52Y          |                              |
| UM36535S    | 3.5V           |                | 53Z          |                              |
| UM36536S    | 3.6V           |                | 54L          |                              |
| UM36537S    | 3.7V           |                | U47          |                              |
| UM36538S    | 3.8V           |                | 54K          |                              |
| UM36539S    | 3.9V           |                | U49          |                              |
| UM36540S    | 4.0V           |                | 54R          |                              |
| UM36541S    | 4.1V           |                | 54A          |                              |
| UM36542S    | 4.2V           |                | U4D          |                              |
| UM36543S    | 4.3V           |                | U4E          |                              |
| UM36544S    | 4.4V           |                | U44          |                              |
| UM36545S    | 4.5V           |                | 54J          |                              |
| UM36546S    | 4.6V           |                | 54N          |                              |
| UM36547S    | 4.7V           |                | 54P          |                              |
| UM36548S    | 4.8V           |                | 54Q          |                              |
| UM36549S    | 4.9V           |                | 54H          |                              |
| UM36550S    | 5.0V           |                | U4F          |                              |

## Ordering Information (Continued)

| Part Number | Output Voltage | Packaging Type | Marking Code | Shipping Qty                 |
|-------------|----------------|----------------|--------------|------------------------------|
| UM36512P    | 1.2V           | SOT323         | VS2          | 3000pcs/7Inch<br>Tape & Reel |
| UM36513P    | 1.3V           |                | VS3          |                              |
| UM36514P    | 1.4V           |                | VS4          |                              |
| UM36515P    | 1.5V           |                | VS5          |                              |
| UM36516P    | 1.6V           |                | VS6          |                              |
| UM36517P    | 1.7V           |                | VS7          |                              |
| UM36518P    | 1.8V           |                | VS8          |                              |
| UM36519P    | 1.9V           |                | VS9          |                              |
| UM36520P    | 2.0V           |                | VSA          |                              |
| UM36521P    | 2.1V           |                | VS8          |                              |
| UM36522P    | 2.2V           |                | VR2          |                              |
| UM36523P    | 2.3V           |                | VR3          |                              |
| UM36524P    | 2.4V           |                | VR4          |                              |
| UM36525P    | 2.5V           |                | VR5          |                              |
| UM36526P    | 2.6V           |                | VR6          |                              |
| UM36527P    | 2.7V           |                | VR7          |                              |
| UM36528P    | 2.8V           |                | VR8          |                              |
| UM36529P    | 2.9V           |                | VR9          |                              |
| UM36530P    | 3.0V           |                | VRA          |                              |
| UM36531P    | 3.1V           |                | VRB          |                              |
| UM36532P    | 3.2V           |                | VZ2          |                              |
| UM36533P    | 3.3V           |                | VZ3          |                              |
| UM36534P    | 3.4V           |                | VZ4          |                              |
| UM36535P    | 3.5V           |                | VZ5          |                              |
| UM36536P    | 3.6V           |                | VZ6          |                              |
| UM36537P    | 3.7V           |                | VZ7          |                              |
| UM36538P    | 3.8V           |                | VZ8          |                              |
| UM36539P    | 3.9V           |                | VZ9          |                              |
| UM36540P    | 4.0V           |                | VZA          |                              |
| UM36541P    | 4.1V           |                | VZB          |                              |
| UM36542P    | 4.2V           |                | ZL2          |                              |
| UM36543P    | 4.3V           |                | ZL3          |                              |
| UM36544P    | 4.4V           |                | ZL4          |                              |
| UM36545P    | 4.5V           |                | ZL5          |                              |
| UM36546P    | 4.6V           |                | ZL6          |                              |
| UM36547P    | 4.7V           |                | ZL7          |                              |
| UM36548P    | 4.8V           |                | ZL8          |                              |
| UM36549P    | 4.9V           |                | ZL9          |                              |
| UM36550P    | 5.0V           |                | ZLA          |                              |

**Absolute Maximum Ratings (Note 1)**

| Symbol           | Parameter                                  | Value        | Unit |
|------------------|--------------------------------------------|--------------|------|
| V <sub>IN</sub>  | Supply Voltage on IN Pin                   | -0.3 to +7.5 | V    |
| V <sub>OUT</sub> | Voltage on OUT Pin                         | -0.3 to +7.5 | V    |
| T <sub>J</sub>   | Operating Junction Temperature (Note 2, 3) | -40 to +125  | °C   |
| T <sub>STG</sub> | Storage Temperature Range                  | -65 to +150  | °C   |
| T <sub>L</sub>   | Lead Temperature for Soldering 10 Seconds  | +300         | °C   |

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.







Note 2: The UM365xx is tested and specified under pulse load conditions such that  $T_J \sim T_A$ . The device is guaranteed to meet performance specifications from 0 °C to 70 °C. Specifications over the -40 °C to 125 °C operating junction temperature range are assured by design, characterization and correlation with statistical process controls.

Note 3: This IC includes overtemperature protection that is intended to protect the device during momentary overload conditions. Junction temperature will exceed 125 °C when overtemperature protection is active. Continuous operation above the specified maximum operating junction temperature may impair device reliability.

**Electrical Characteristics**
 $V_{CC}=V_{OUT}+1V$  ( $V_{OUT}\geq 1.5V$ ) or  $V_{CC}=2.5V$  ( $V_{OUT}\leq 1.5V$ ),  $T_A=-40^{\circ}C$  to  $+85^{\circ}C$ .


| Symbol             | Parameter                                              | Test Conditions                                                                                    |         | Min  | Typ | Max  | Unit              |
|--------------------|--------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------|------|-----|------|-------------------|
| V <sub>IN</sub>    | Input Voltage Range                                    |                                                                                                    |         | 2.5  |     | 6    | V                 |
| V <sub>OUT</sub>   | Output Voltage Range                                   |                                                                                                    |         | 1.2  |     | 5.0  | V                 |
| I <sub>Q</sub>     | Operating Quiescent Current                            | I <sub>OUT</sub> =0mA                                                                              |         |      | 50  | 120  | μA                |
|                    |                                                        | I <sub>OUT</sub> =300mA                                                                            |         |      | 90  | 130  |                   |
| I <sub>OUT</sub>   | Output Current                                         |                                                                                                    |         | 300  |     |      | mA                |
|                    | Output Voltage Accuracy                                | 1mA≤I <sub>OUT</sub> ≤300mA,<br>T <sub>A</sub> =-40 ℃ to +85 ℃                                     |         | -2.5 |     | +2.5 | %                 |
| ΔV <sub>DO</sub>   | Dropout Voltage                                        | I <sub>OUT</sub> =100mA                                                                            |         |      | 150 | 200  | mV                |
| I <sub>LIMIT</sub> | Output Current Limit                                   |                                                                                                    |         | 330  | 450 | 700  | mA                |
|                    | Output Voltage TC                                      |                                                                                                    |         |      | 100 |      | ppm/ ℃            |
| T <sub>SHDN</sub>  | Thermal-Shutdown Temperature                           |                                                                                                    |         |      | 160 |      | ℃                 |
| ΔT <sub>SHDN</sub> | Thermal-Shutdown Hysteresis                            |                                                                                                    |         |      | 35  |      | ℃                 |
|                    | Line Regulation (V <sub>OUT</sub> >4.0V)               | V <sub>OUT</sub> +0.3V≤V <sub>IN</sub> ≤6.0V or<br>V <sub>IN</sub> >2.5V<br>I <sub>OUT</sub> =10mA |         |      |     | 0.5  | % /V              |
|                    | Line Regulation (V <sub>OUT</sub> ≤4.0V)               |                                                                                                    |         |      |     | 0.3  |                   |
|                    | Load Regulation (V <sub>OUT</sub> >4.0V)               | V <sub>IN</sub> =V <sub>OUT</sub> +1V or V <sub>IN</sub> >2.5V<br>1mA≤I <sub>OUT</sub> ≤300mA      |         |      |     | 1.2  | %                 |
|                    | Load Regulation (V <sub>OUT</sub> ≤4.0V)               |                                                                                                    |         |      |     | 0.6  |                   |
|                    | Output Voltage Noise                                   | 10Hz to 100KHz<br>C <sub>IN</sub> =1μF, I <sub>OUT</sub> =10mA                                     |         |      | 200 |      | μV <sub>RMS</sub> |
| PSRR               | Power Supply Ripple Rejection (V <sub>OUT</sub> >4.0V) | V <sub>IN</sub> =V <sub>OUT</sub> +1V<br>or V <sub>IN</sub> >2.5V<br>I <sub>OUT</sub> =100mA       | f=100Hz | 40   |     |      | dB                |
|                    |                                                        |                                                                                                    | f=10kHz | 30   |     |      |                   |
|                    | Power Supply Ripple Rejection (V <sub>OUT</sub> ≤4.0V) |                                                                                                    | f=100Hz | 60   |     |      |                   |
|                    |                                                        |                                                                                                    | f=10kHz | 30   |     |      |                   |
|                    | ESD Rating                                             | Human Body Mode                                                                                    |         | 2    |     |      | kV                |

## Typical Performance Characteristics

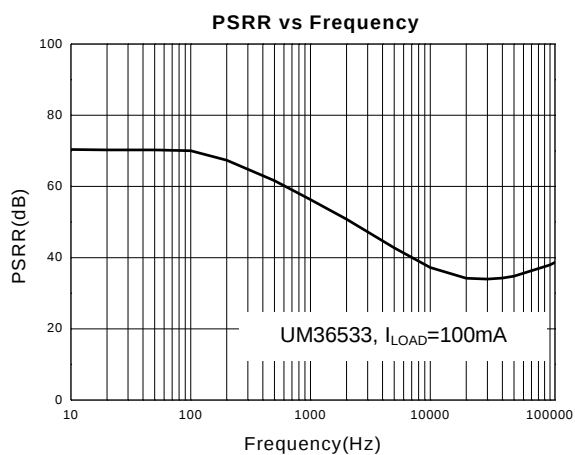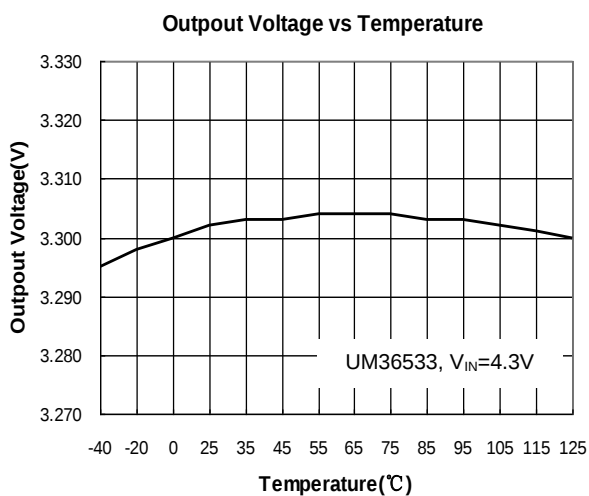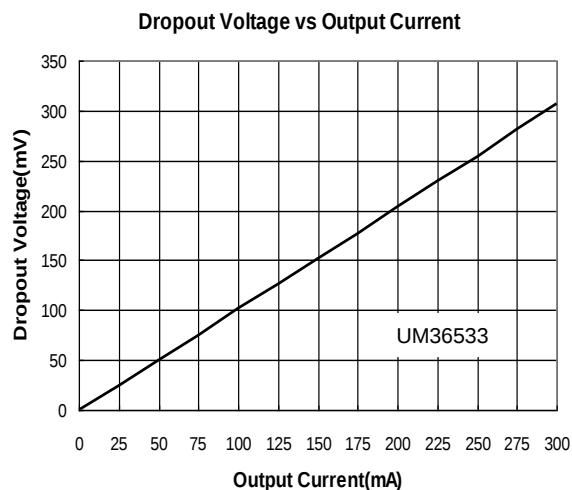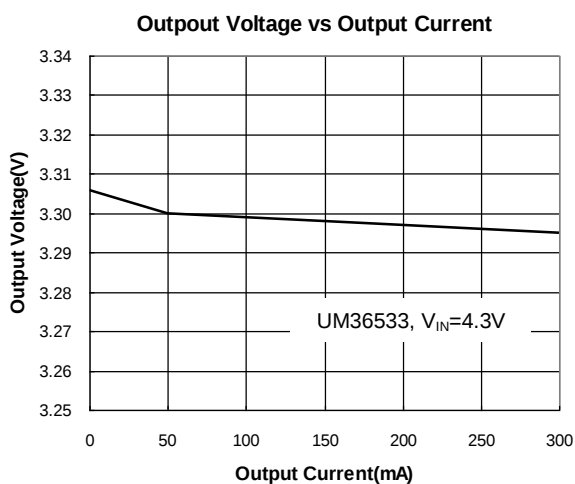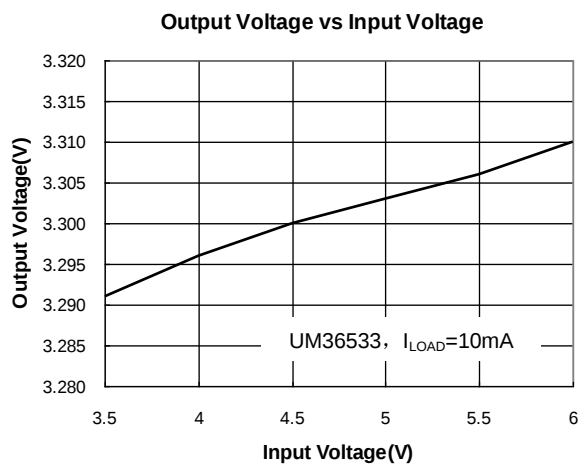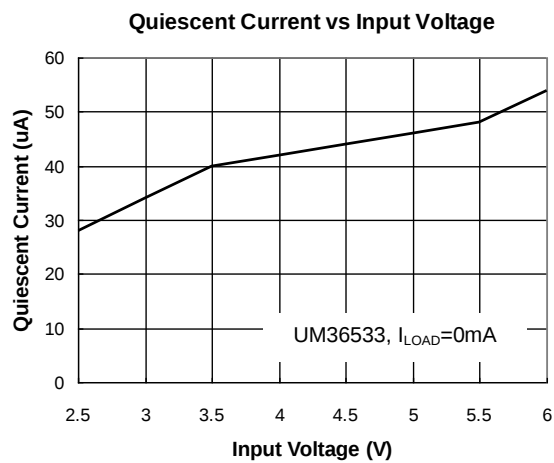


## Typical Performance Characteristics (Continued)

### Line Transient Response

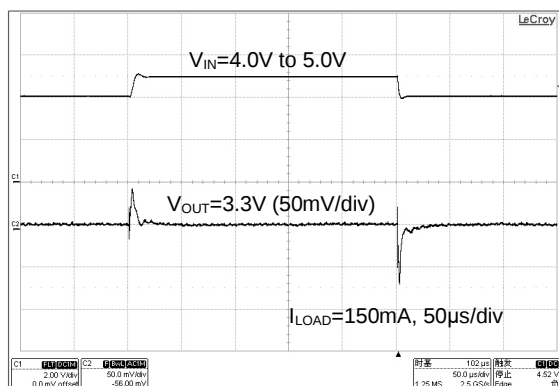

### Load Transient Response

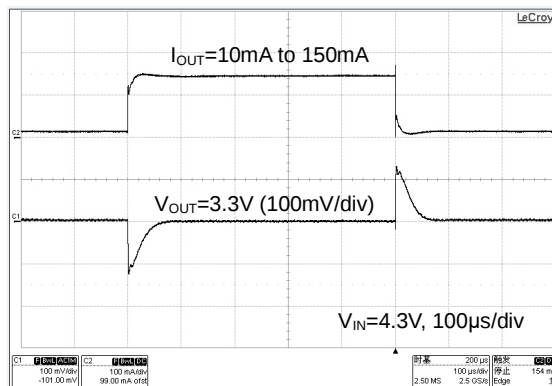


## Pin Function

**GND (Pin 1):** Ground and Heat Sink. Solder to a ground plane or large pad to maximize heat dissipation.

**OUT (Pin 2):** Voltage Regulated Output. The OUT pin supplies power to the load. A minimum output capacitor of 1µF is required to ensure stability. Larger output capacitors may be required for applications with large transient loads to limit peak voltage transients.

**IN (Pin 3):** Power for UM365xx and Load Power is supplied to the devices through the IN pin. The IN pin should be locally bypassed to ground if the UM365xx series are more than a few inches away from another source of bulk capacitance. In general, the output impedance of a battery rises with frequency, so it is usually advisable to include an input bypass capacitor in battery-powered circuits. A capacitor in the range of 0.1µF to 1µF is usually sufficient.


## Typical Application Circuit

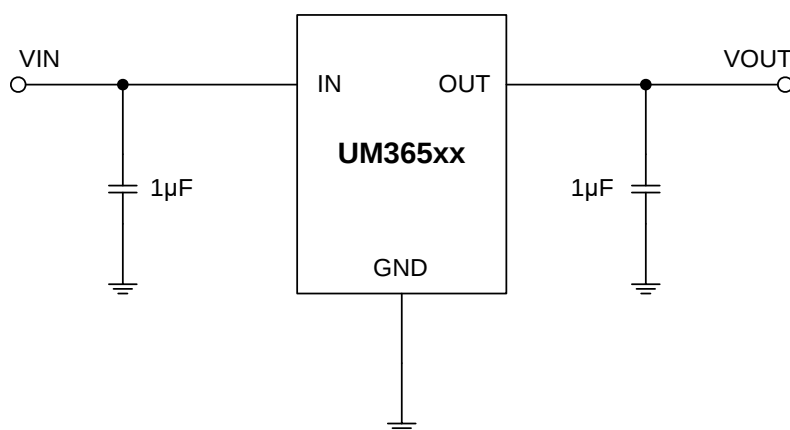


## Package Information

### UM365xxS: SOT23-3

#### Outline Drawing

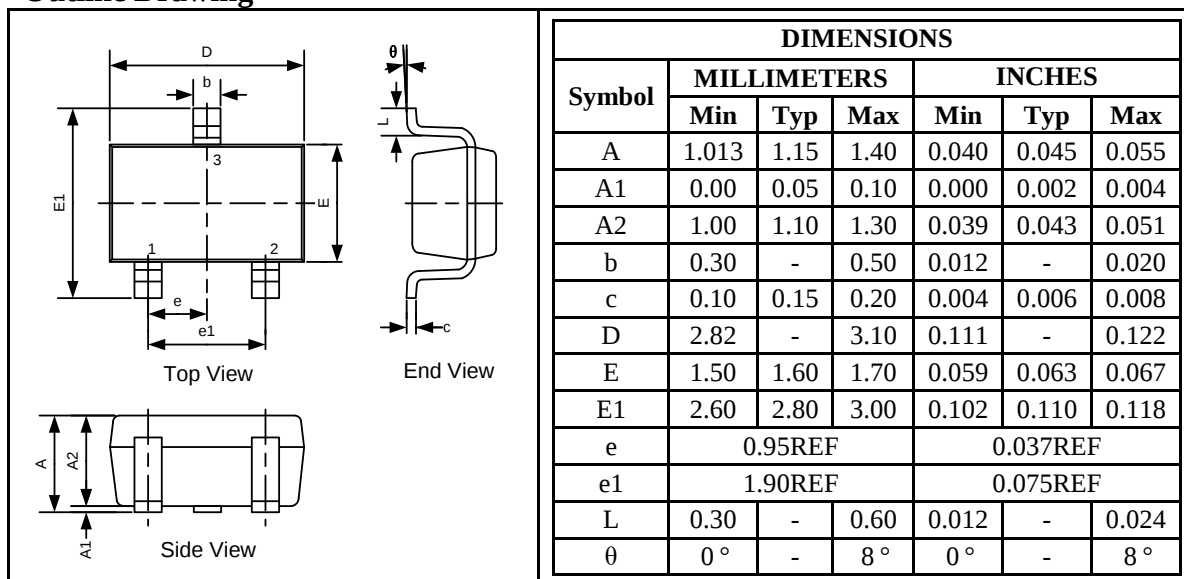

#### Land Pattern

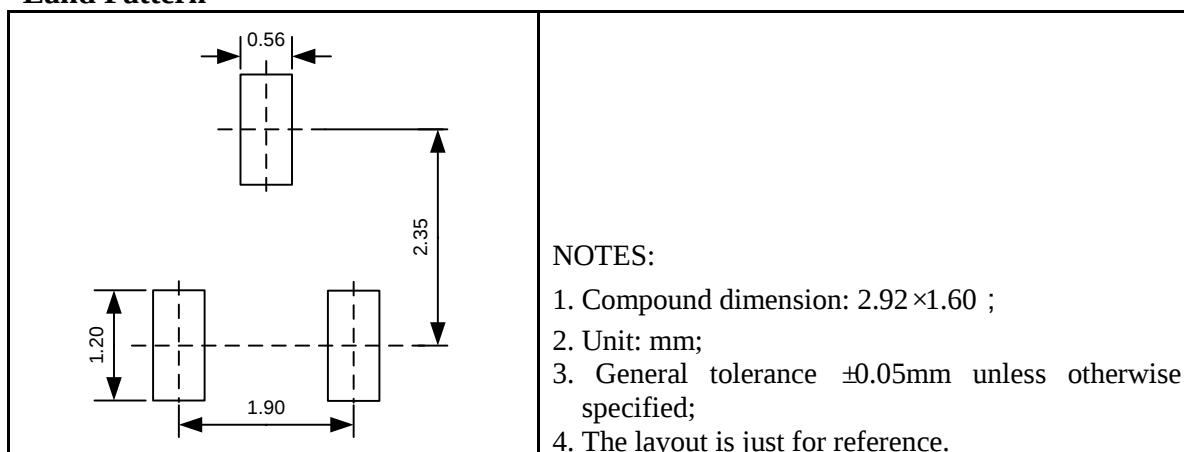


#### Tape and Reel Orientation




## UM365xxP: SOT323

### Outline Drawing

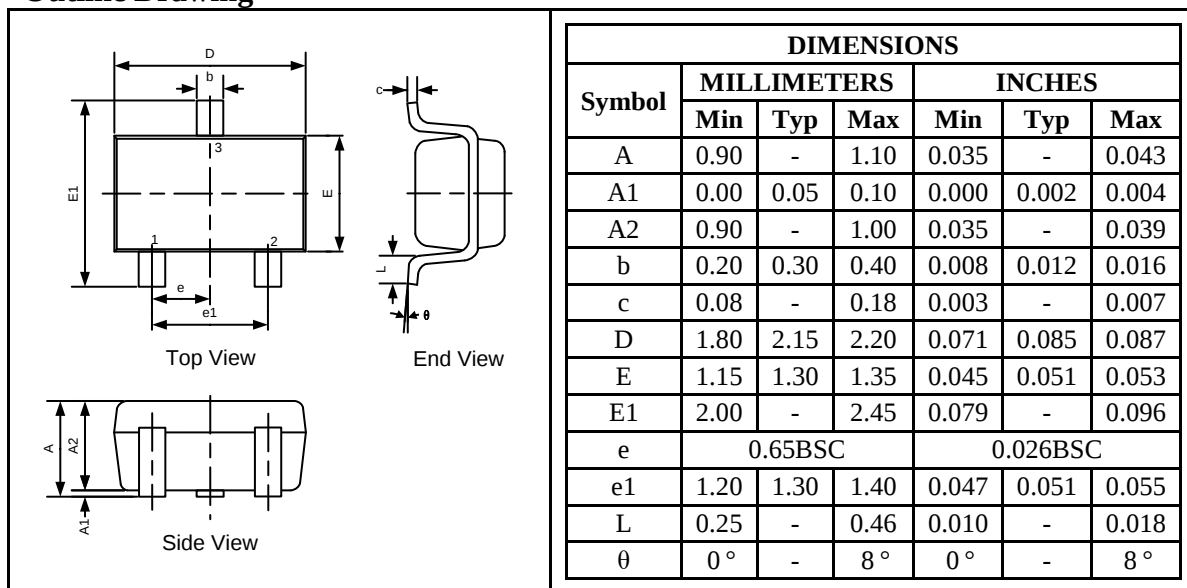

### Land Pattern

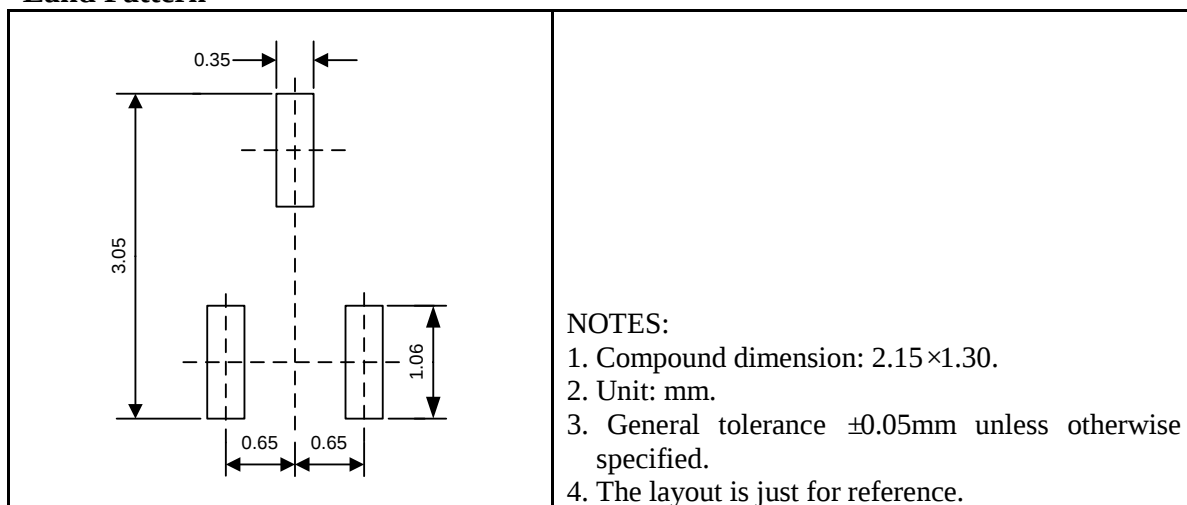

### Tape and Reel Orientation



---

## **GREEN COMPLIANCE**

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

[http://www.union-ic.com/index.aspx?cat\\_code=RoHSDeclaration](http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration)

## **IMPORTANT NOTICE**

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.