

20V P-Channel Power MOSFET

UM8516 SOT23-6

General Description

The UM8516 is a low threshold P-channel MOSFET with gate to source TVS protection, have extremely low on-resistance. This benefit provides the designer with an extremely efficient device for use in battery and load management applications. The devices use a space-saving, small-outline SOT23-6 package.


Applications

- Battery Packs
- Battery-Powered Portable Equipment
- Cellular and Cordless Telephones


Features

- Drain-Source Voltage (Max): -20V
- Low On-Resistance:
65mΩ@V_{GS}=-4.5V
75mΩ@V_{GS}=-2.5V
- Continuous Drain Current (Max): -4A@25 °C

Pin Configurations



Top View



XX: Week Code
UM8516
SOT23-6

Ordering Information

Part Number	Packaging Type	Marking Code	Shipping Qty
UM8516	SOT23-6	UCN	3000pcs/7 Inch Tape & Reel

Absolute Maximum Ratings







Symbol	Parameter	Value	Units
V _{DSS}	Drain-Source Voltage	-20	V
V _{GS}	Gate-Source Voltage	±8	V
I _D	Continuous Drain Current	-4.0	A
I _{DM}	Drain Current Pulsed	-20	A
P _D	Power Dissipation	0.7	W
T _J	Junction Temperature	-55~150	°C
T _{stg}	Storage Temperature	-55~150	°C
R _{θJA}	Thermal Resistance, Junction-to-Ambient	100	°C/W

Electrical Characteristics

 (T_J=25 °C, unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
Off Characteristics						
BV _{DSS}	Drain to Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-20			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-20V, V _{GS} =0V			-1	μA
I _{GSS}	Gate-to-Source Leakage Current	V _{GS} =±6V, V _{DS} =0V			±10	μA
On Characteristics						
R _{DS(ON)}	Static Drain-to-Source On-Resistance	V _{GS} =-4.5V, I _D =-4.0A		52	65	mΩ
		V _{GS} =-2.5V, I _D =-4.0A		60	75	
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-0.4	-0.6	-1	V
g _{fs}	Forward Transconductance	V _{DS} =-10V, I _D =-2.7A		9		S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =-15V, f=1.0MHz		990		pF
C _{oss}	Output Capacitance			92		
C _{rss}	Reverse Transfer Capacitance			15		
Switching Characteristics						
Q _{g(TH)}	Threshold Gate Charge	V _{DS} =-10V, V _{GS} =-4.5V, I _D =-4.2A		10.8		nC
Q _{gs}	Gate-Source Charge			2.46		
Q _{gd}	Gate-Drain Charge			2.41		
td(on)	Turn-on Delay Time	V _{GS} =-4.5V, V _{DS} =-10V, I _D =-1A R _L =10Ω, R _G =2.8Ω		48		ns
tr	Rise Time			95		
td(off)	Turn-off Delay Time			680		
tf	Fall Time			250		
Drain-Source Diode Characteristics and Maximum Ratings						
V _{SD}	Forward Diode Voltage	V _{GS} =0V, I _S =-1A		-0.7	-1.4	V


Typical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

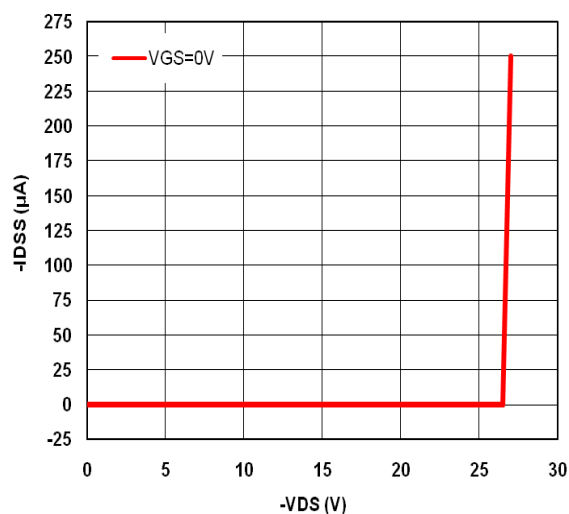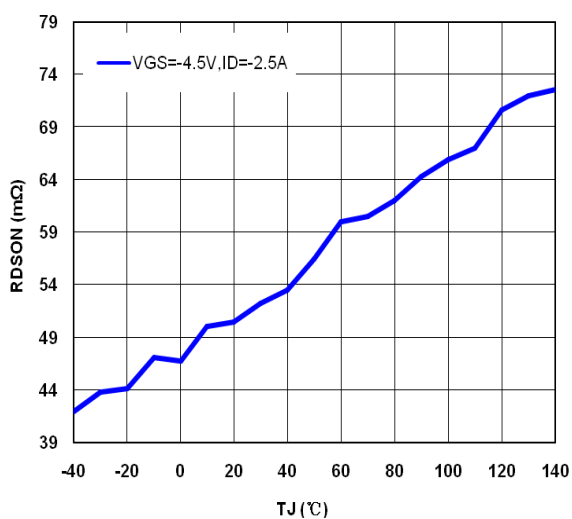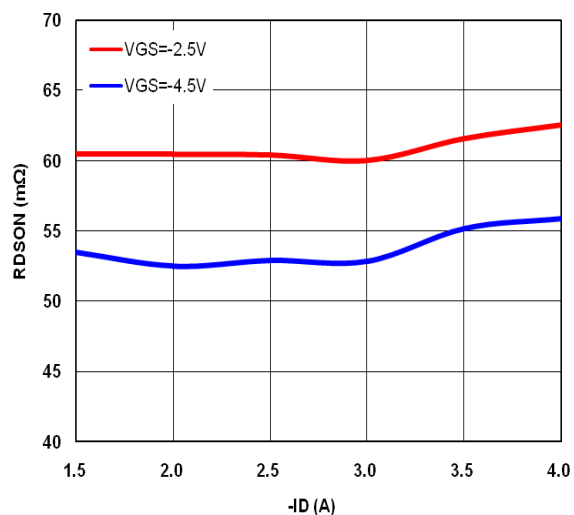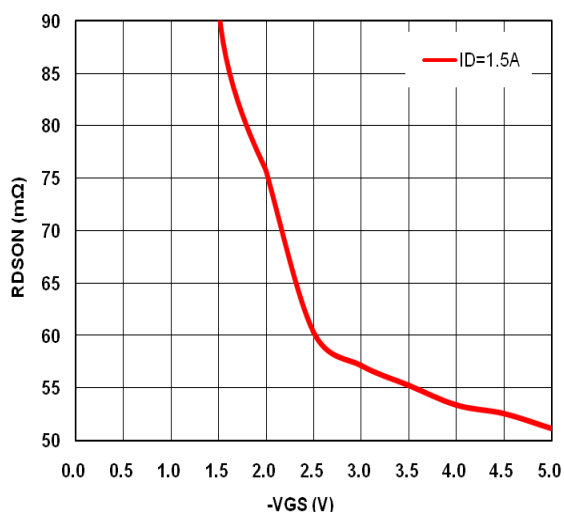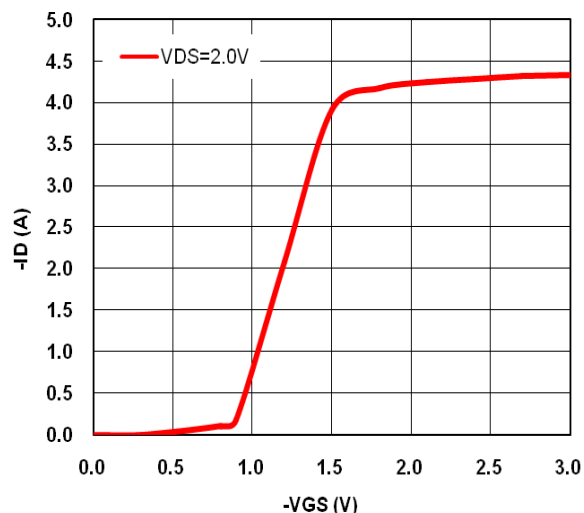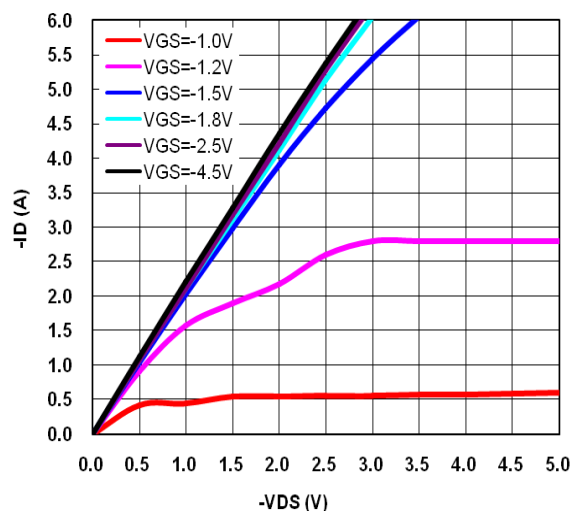


Package Information

UM8516 SOT23-6

Outline Drawing

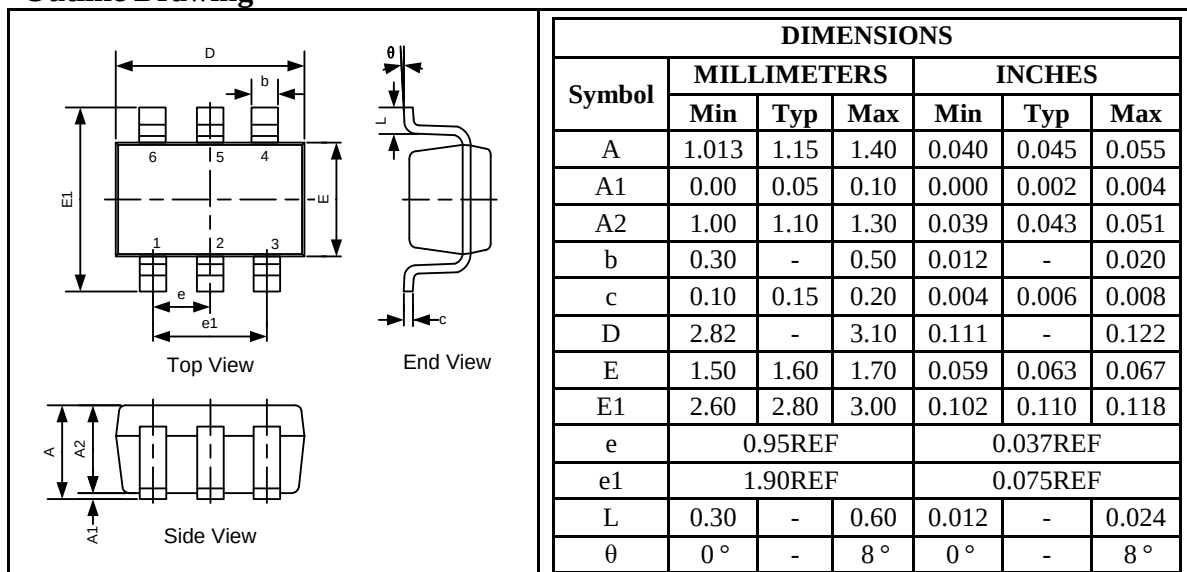

Land Pattern

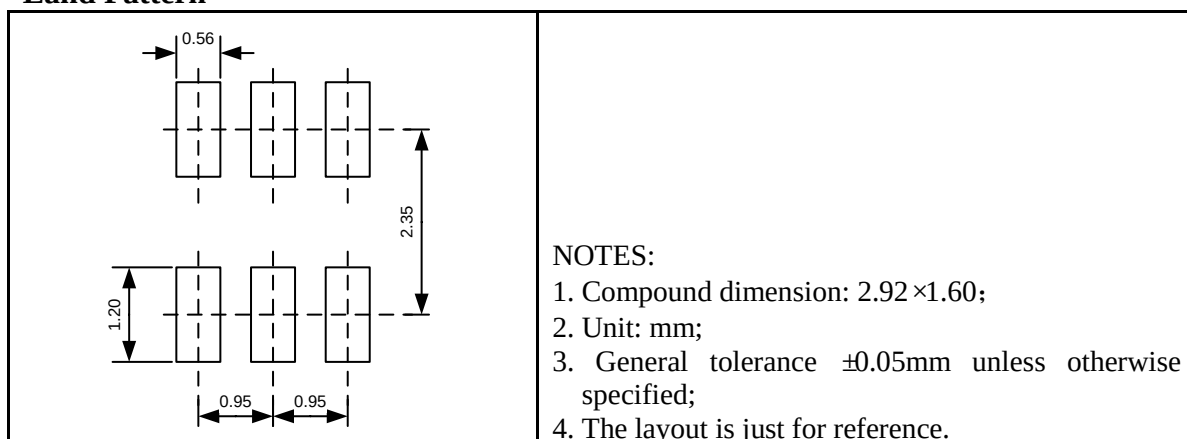

Tape and Reel Orientation



GREEN COMPLIANCE

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration

IMPORTANT NOTICE

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.